




# 30X30X06mm




## General Specifications

Airflow	2.0~3.5 CFM
Static Pressure	1.52~3.81 mmAq
Frame	Plastic UL94V-0
Lead Wire	UL1571 AWG28
Impeller	Plastic UL94V-0

## Dimensions:mm

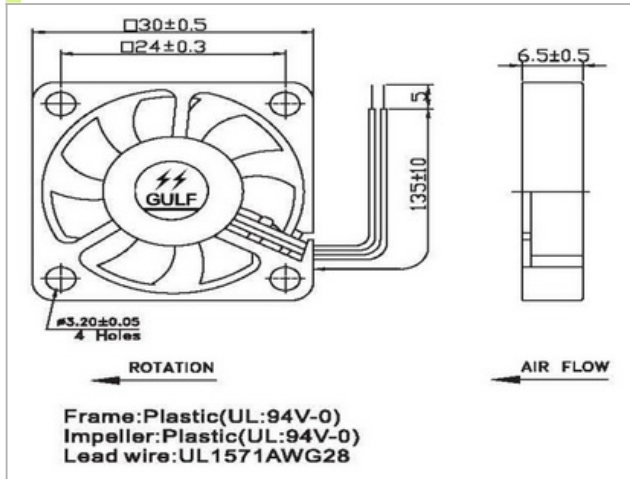

## Performance

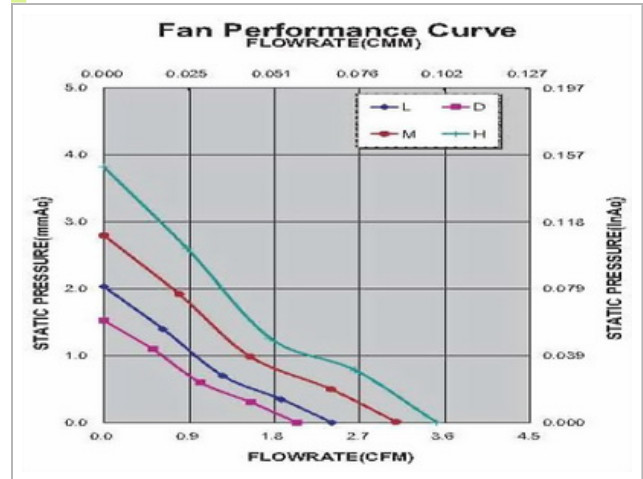

## Specifications

Model NO.	Bearing	Rated Voltage	Speed	Airflow		Static Pressure	Current		Power	Noise	Weight
		VDC		RPM	CFM		A	W			
GD053006DX-A	Hypro	5	6000	2.0	1.52	0.05	0.25	18.0	6		
GD053006LX-A	Hypro	5	7500	2.4	2.03	0.06	0.40	22.0	6		
GD053006MX-A	Hypro	5	9000	3.0	2.79	0.08	0.55	25.5	6		
GD053006HX-A	Hypro	5	10500	3.5	3.81	0.12	0.60	32.0	6		
GD123006LX-A	Hypro	12	7500	2.4	2.03	0.05	0.60	22.0	6		
GD123006HX-A	Hypro	12	10500	3.5	3.81	0.08	0.96	32.3	6		