


30X30X15mm




General Specifications

Airflow	3.8~6.1 CFM
Static Pressure	2.8~7.1 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1571 #28 AWG

Dimensions:mm

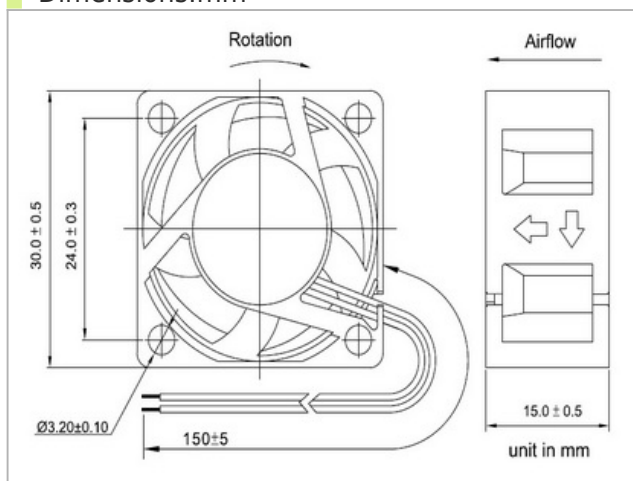

Performance

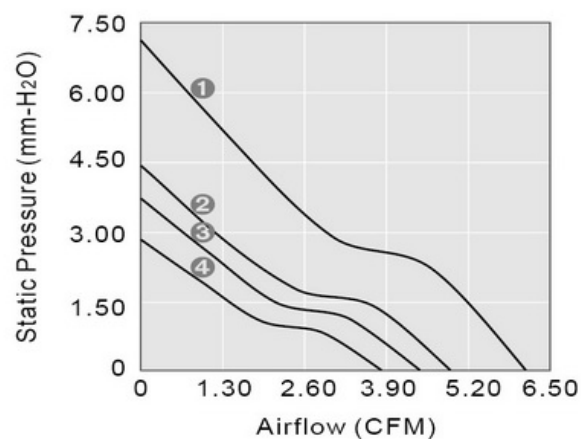

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD053015LB-N	2BALL	5	4~5.5	7000	3.8	2.8	60	0.30	80000	4	<17	13
GD053015MB-N	2BALL	5	4~5.5	8000	4.4	3.7	85	0.42	80000	3	20.5	13
GD053015HB-N	2BALL	5	4~5.5	9000	4.9	4.4	110	0.55	75000	2	25.0	13
GD053015EB-N	2BALL	5	4~5.5	11000	5.7	6.3	200	1.00	65000	1	30.0	13
GD123015LB-N	2BALL	12	7~13.2	7000	3.8	2.8	30	0.36	80000	4	<17	13
GD123015MB-N	2BALL	12	7~13.2	8000	4.4	3.7	40	0.48	80000	3	20.5	13
GD053015HB-N	2BALL	12	7~13.2	9000	4.9	4.4	45	0.54	75000	2	25.0	13
GD123015EB-N	2BALL	12	7~13.2	11500	6.1	7.1	90	1.08	65000	1	30.0	13