


36X36X28mm




General Specifications

Airflow	18.74~24.99 CFM
Static Pressure	36.63~65.09 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1061 #28 AWG

Dimensions:mm

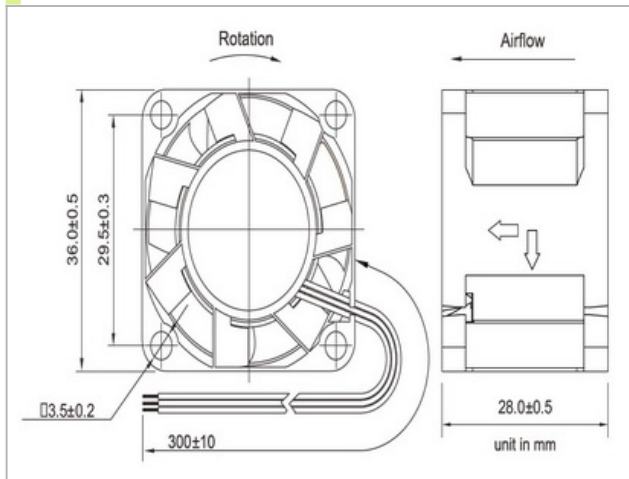

Performance

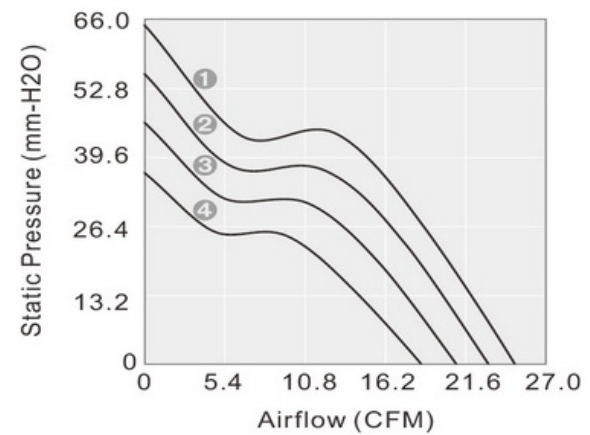

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD123628MB-P	2BALL	12	7~13.2	17000	18.74	36.63	500	6.00	80000	4	56.0	46.5
GD123628HB-P	2BALL	12	7~13.2	19000	21.05	46.40	650	7.80	75000	3	59.5	46.5
GD123628EB-P	2BALL	12	7~13.2	21000	23.22	55.71	850	10.20	65000	2	61.0	46.5
GD123628EB-P	2BALL	12	7~13.2	23000	24.99	65.09	1000	12.00	65000	1	63.0	46.5