




38X38X28mm




General Specifications

Airflow	13.73~20.86 CFM
Static Pressure	37.13~77.26 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1061 #28 AWG

Dimensions:mm

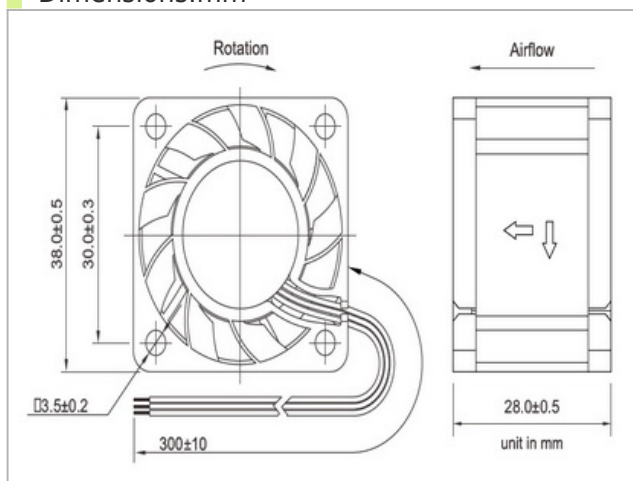

Performace

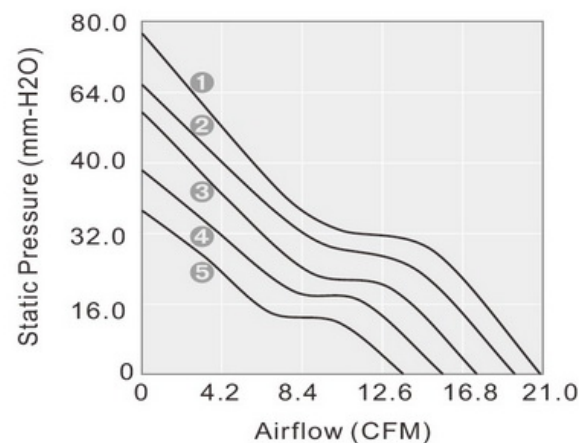

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD123828MB-P	2BALL	12	7~13.2	17000	13.73	37.13	300	3.60	80000	5	46.5	47
GD123828HB-P	2BALL	12	7~13.2	19000	15.77	46.27	400	4.80	75000	4	48.0	47
GD123828EB-P	2BALL	12	7~13.2	21000	17.53	59.41	500	6.00	65000	3	53.0	47
GD123828EB-P	2BALL	12	7~13.2	23500	19.49	65.37	700	8.40	65000	2	56.0	47
GD123828UB-P	2BALL	12	7~13.2	25000	20.86	77.26	850	10.20	65000	1	57.5	47