


38X38X48mm




General Specifications

Airflow	23.48~29.28 CFM
Static Pressure	53.9~79.1 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1061 #28 AWG

Dimensions:mm

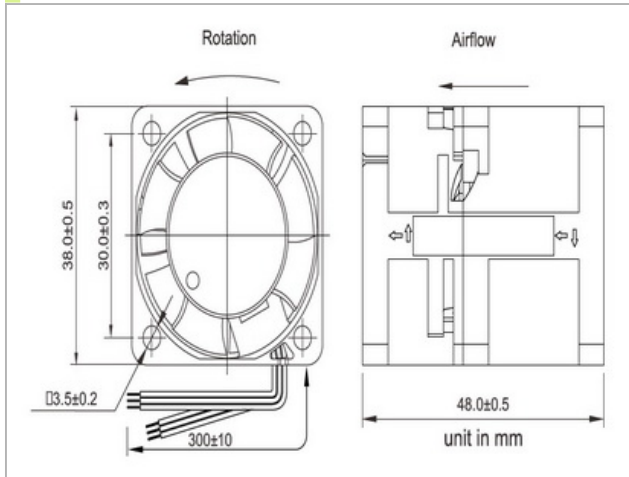

Performace

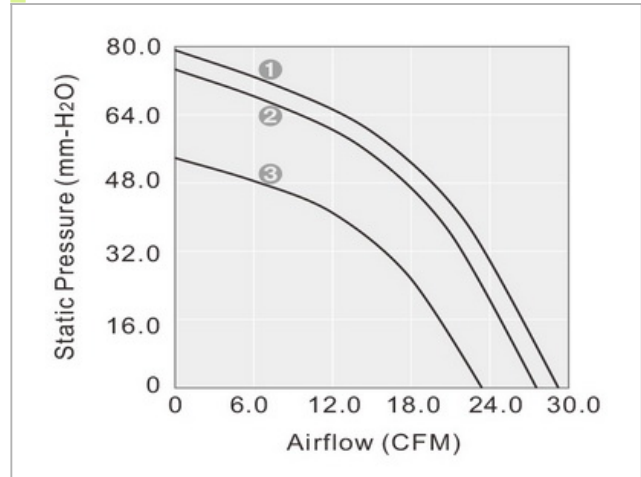

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD123848HB-P	2BALL	12	7~13.2	20000/12500	23.48	53.9	450	5.40	65000	3	59.0	72.4
GD123848EB-P	2BALL	12	7~13.2	23500/14500	27.62	74.6	700	8.40	65000	2	62.5	72.4
GD123848UB-P	2BALL	12	7~13.2	25000/15000	29.28	79.1	830	9.96	60000	1	64.0	72.4