




40X40X06mm




General Specifications

Airflow	4.22~5.80 CFM
Static Pressure	1.21~2.28 mmAq
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1571 AWG28

Dimensions:mm

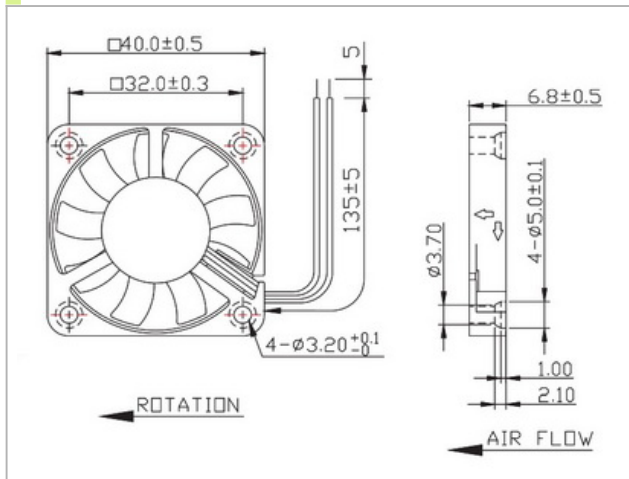

Performance

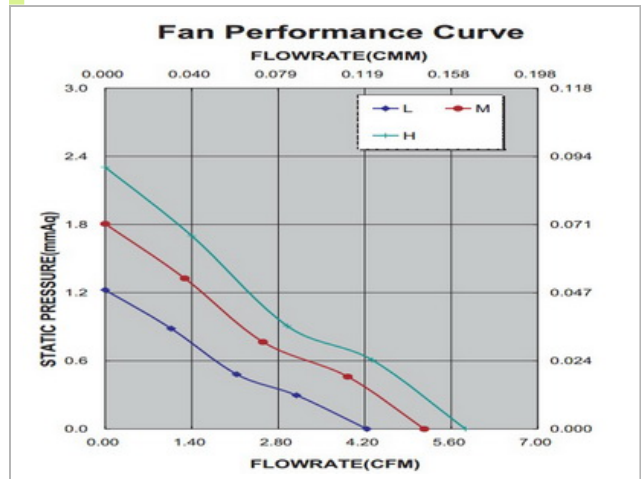

Specifications

Model NO.	Bearing	Rated Voltage VDC	Speed RPM	Airflow CFM	Static Pressure mmAq	Current A	Power W	Noise dBA	Weight g
GD054006LX-A	Hypro	5	4800	4.22	1.21	0.04	0.20	22.0	9
GD054006MB-A	Hypro	5	5800	5.10	1.77	0.07	0.35	27.6	9
GD054006HX-A	Hypro	5	6600	5.80	2.28	0.10	0.50	31.0	9
GD124006LX-A	Hypro	12	4800	4.22	1.21	0.04	0.48	22.0	9
GD124006MX-A	Hypro	12	5800	5.10	1.77	0.05	0.60	27.6	9
GD124006HX-A	Hypro	12	6600	5.80	2.28	0.06	0.72	31.0	9