




40X40X10mm




General Specifications

Airflow	5.08~8.71 CFM
Static Pressure	1.69~5.08 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

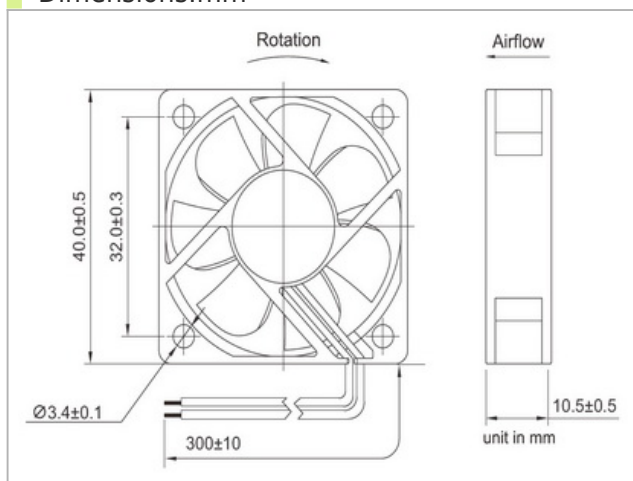

Performance

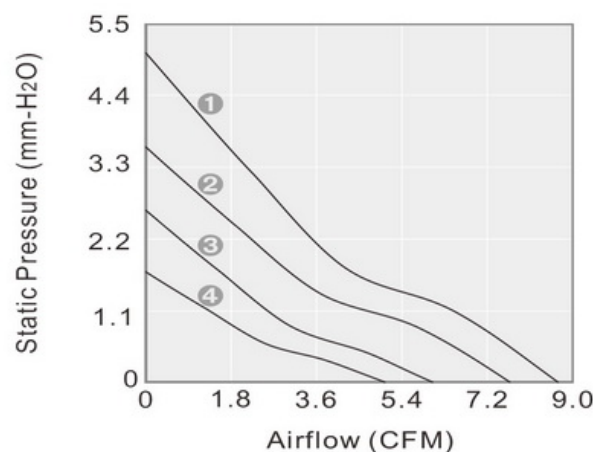

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD054010LL-N	Sintetico	5	4~5.5	5000	5.08	1.69	70	0.35	50000	4	17.5	13.6
GD054010ML-N	Sintetico	5	4~5.5	6000	6.09	2.64	120	0.60	50000	3	21.5	13.6
GD054010HL-N	Sintetico	5	4~5.5	7500	7.69	3.64	180	0.90	50000	2	25.0	13.6
GD124010LB-N	2BALL	12	8~13.2	5000	5.08	1.69	25	0.30	80000	4	17.5	13.6
GD124010MB-N	2BALL	12	8~13.2	6000	6.09	2.64	40	0.48	80000	3	21.5	13.6
GD124010HB-N	2BALL	12	7~13.2	7500	7.69	3.64	60	0.72	75000	2	25.0	13.6
GD124010EB-N	2BALL	12	7~13.2	8500	8.71	5.09	80	0.96	65000	1	28.0	13.6
GD124010LL-N	Sintetico	12	7~13.2	5000	5.08	1.69	30	0.42	50000	4	17.5	13.6
GD124010ML-N	Sintetico	12	7~13.2	6000	6.09	2.64	50	0.60	50000	3	21.5	13.6
GD124010HL-N	Sintetico	12	7~13.2	7500	7.69	3.64	75	0.90	50000	2	25.0	13.6