


40X40X15mm




General Specifications

Airflow	5.6~14.6 CFM
Static Pressure	2.6~14.6 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

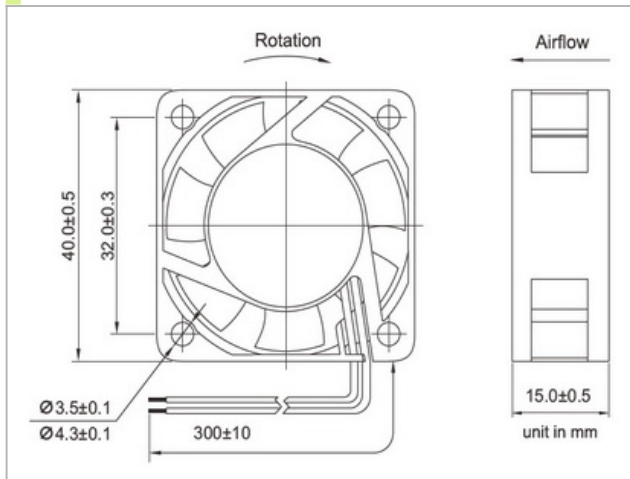

Performance

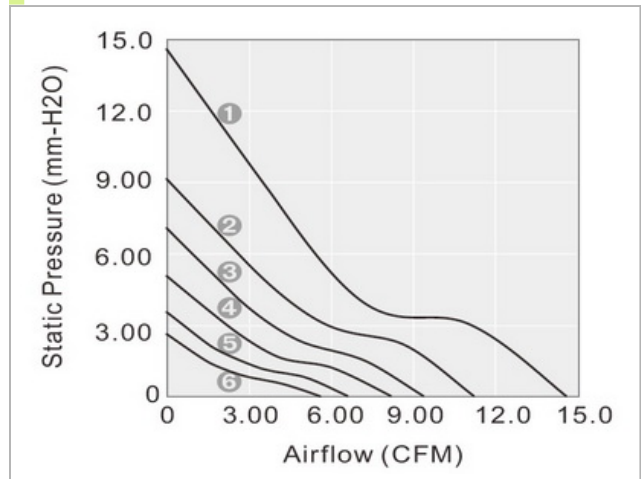

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD124015LB-N	2BALL	12	7~13.2	5000	5.6	2.6	90	1.08	80000	6	24.0	26
GD124015MB-N	2BALL	12	7~13.2	6000	6.6	3.5	100	1.20	80000	5	29.3	26
GD124015HB-N	2BALL	12	7~13.2	7000	8.2	5.1	130	1.56	75000	4	33.2	26
GD124015EB-N	2BALL	12	7~13.2	8300	9.4	7.1	190	2.28	65000	3	36.8	26
GD124015EB-N	2BALL	12	7~13.2	9500	11.2	9.1	240	2.88	65000	2	40.8	26
GD124015UB-N	2BALL	12	7~13.2	11000	14.6	14.6	280	3.36	65000	1	42.5	26