




40X40X20mm




General Specifications

Airflow	5.2~10.7 CFM
Static Pressure	2.7~8.0 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

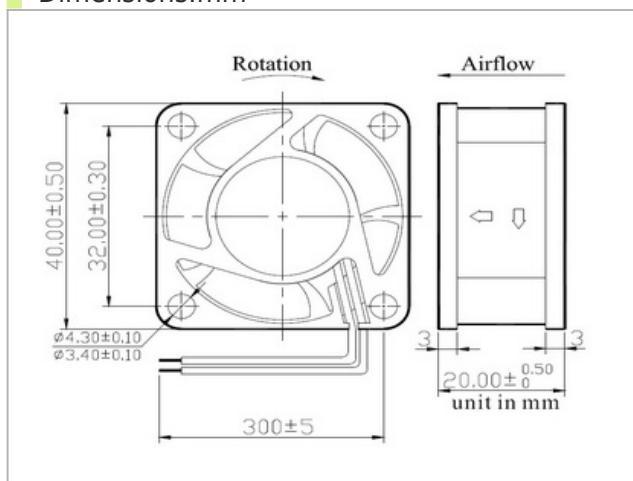

Performance

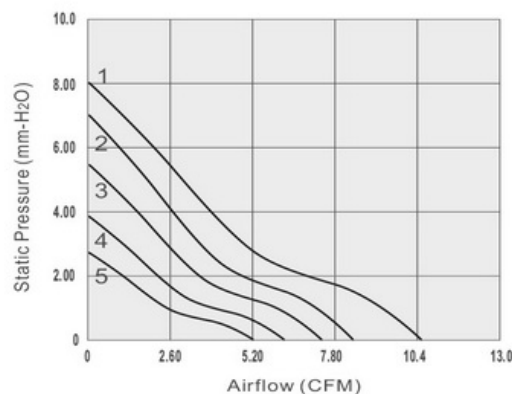

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C	P-Q Curve	Noise	Weight
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	HOUR		dBA	g
GD054020LB	2BALL	5	4~5.5	4600	5.2	2.7	110	0.55	80000	5	20.0	24
GD054020MB	2BALL	5	4~5.5	5600	6.3	3.8	140	0.70	80000	4	24.0	24
GD054020HB	2BALL	5	4~5.5	6600	7.5	5.4	180	0.90	75000	3	27.0	24
GD054020EB	2BALL	5	4~5.5	7600	8.5	7.0	230	1.15	75000	2	31.5	24
GD124020LB	2BALL	12	7~13.2	4600	5.2	2.7	50	0.60	80000	5	20.0	24
GD124020MB	2BALL	12	7~13.2	5600	6.3	3.8	70	0.84	80000	4	24.0	24
GD124020HB	2BALL	12	7~13.2	6600	7.5	5.4	100	1.20	75000	3	27.0	24
GD124020EB	2BALL	12	7~13.2	9000	10.7	8.0	120	1.44	75000	1	35.5	24
GD244020MB	2BALL	24	12~26.4	5600	6.3	3.8	40	0.96	80000	4	24.0	24
GD244020HB	2BALL	24	12~26.4	6600	7.5	5.4	50	1.20	75000	3	27.0	24
GD244020EB	2BALL	24	12~26.4	7600	8.5	7.0	80	1.92	75000	2	31.5	24