


40X40X28mm




General Specifications

Airflow	10.3~25.9 CFM
Static Pressure	7.9~39.0 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

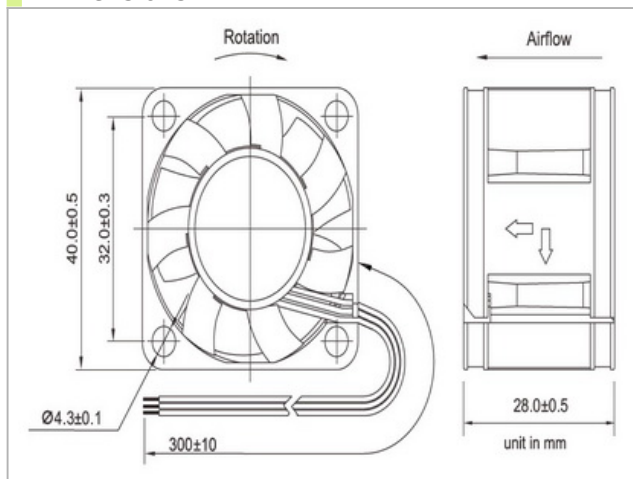

Performance

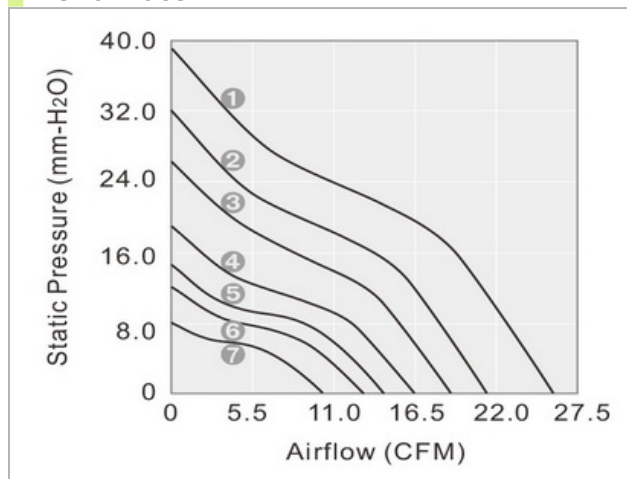

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD054028HB-P	2BALL	5	4~5.5	8000	14.4	14.6	480	2.04	75000	5	37.5	45.1
GD124028LB-P	2BALL	12	7~13.2	5000	10.3	7.9	90	1.08	80000	7	24.5	45.1
GD124028MB-P	2BALL	12	7~13.2	7000	13.0	12.0	150	1.80	80000	6	34.5	45.1
GD124028HB-P	2BALL	12	7~13.2	8000	14.4	14.6	180	2.16	75000	5	37.5	45.1
GD124028EB-P	2BALL	12	7~13.2	9500	16.5	18.9	260	3.12	65000	4	41.0	45.1
GD124028EB-P	2BALL	12	7~13.2	11000	19.0	26.2	460	5.52	65000	3	47.0	45.1
GD124028EB-P	2BALL	12	7~13.2	13000	21.4	31.9	550	6.60	65000	2	49.5	45.1
GD124028EB-P	2BALL	12	7~13.2	16000	25.9	39.0	750	9.00	65000	1	51.5	45.1
GD244028LB-P	2BALL	24	12~26.4	5000	10.3	7.9	80	1.92	80000	7	24.5	45.1
GD244028MB-P	2BALL	24	12~26.4	7000	13.0	12.0	90	2.04	80000	6	34.5	45.1
GD244028HB-P	2BALL	24	12~26.4	8000	14.4	14.6	160	3.84	75000	5	37.5	45.1
GD244028EB-P	2BALL	24	12~26.4	9500	16.5	18.9	200	4.80	65000	4	41.0	45.1
GD244028EB-P	2BALL	24	12~26.4	11000	19.0	26.2	280	6.72	65000	3	47.0	45.1
GD244028EB-P	2BALL	24	12~26.4	13000	21.4	31.9	430	10.32	65000	2	49.5	45.1