




50X50X10mm




General Specifications

Airflow	8.3~13.5 CFM
Static Pressure	1.0~3.2 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

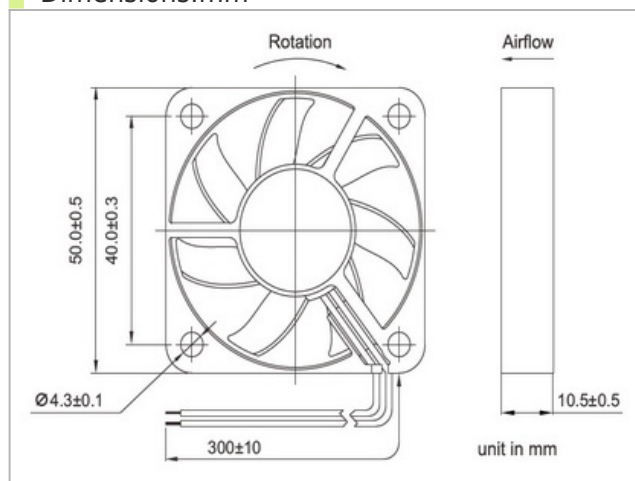

Performace

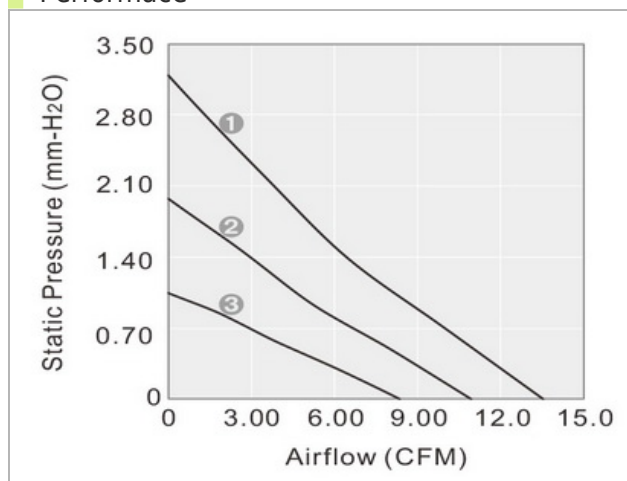

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD055010LL-N	Sintetico	5	4~5.5	3500	8.3	1.0	85	0.43	50000	3	21.8	18
GD055010ML-N	Sintetico	5	4~5.5	4500	10.9	2.0	140	0.70	50000	2	27.3	18
GD055010HL-N	Sintetico	5	4~5.5	5500	13.5	3.2	240	1.20	50000	1	31.7	18
GD125010LB-N	2BALL	12	7~13.2	3500	8.3	1.0	60	0.72	80000	3	21.8	18
GD125010MB-N	2BALL	12	7~13.2	4500	10.9	2.0	90	1.08	80000	2	27.3	18
GD125010HB-N	2BALL	12	7~13.2	5500	13.5	3.2	125	1.50	75000	1	31.7	18
GD125010LL-N	Sintetico	12	7~13.2	3500	8.3	1.0	60	0.72	50000	3	21.8	18
GD125010ML-N	Sintetico	12	7~13.2	4500	10.9	2.0	100	1.20	50000	2	27.3	18
GD125010HL-N	Sintetico	12	7~13.2	5500	13.5	3.2	180	2.16	50000	1	31.7	18
GD125010LS-N	SLEEVE	12	7~13.2	3500	8.3	1.0	60	0.72	30000	3	21.8	18
GD125010MS-N	SLEEVE	12	7~13.2	4500	10.9	2.0	90	1.08	30000	2	27.3	18
GD125010HS-N	SLEEVE	12	7~13.2	5500	13.5	3.2	125	1.50	25000	1	31.7	18