




50X50X20mm




General Specifications

Airflow	8.9~14.0 CFM
Static Pressure	2.1~5.5 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

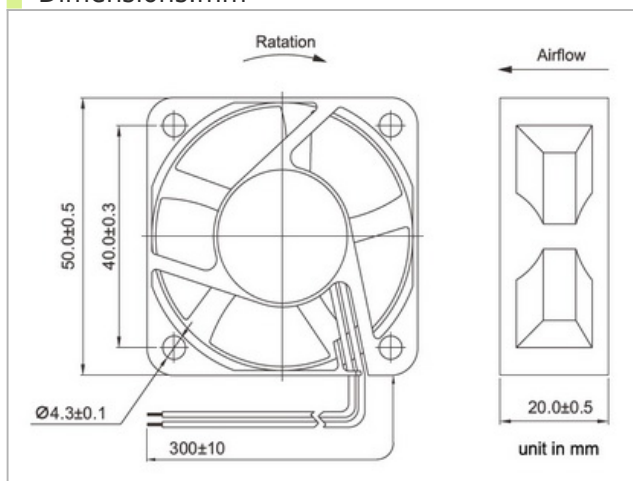

Performance

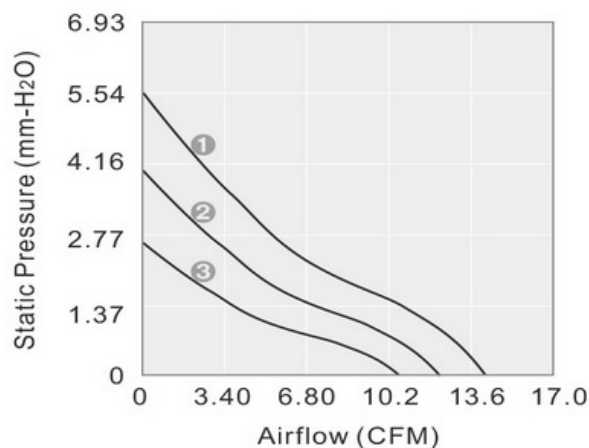

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD125020LS	SLEEVE	12	7~13.2	3500	8.9	2.1	60	0.72	30000	3	22.5	36
GD125020MS	SLEEVE	12	7~13.2	4300	11.0	4.0	90	1.08	30000	2	25.0	36
GD125020HS	SLEEVE	12	7~13.2	5300	13.2	4.7	110	1.32	25000	1	30.0	36
GD125020LL	Sintetico	12	7~13.2	3500	8.9	2.1	75	0.90	50000	3	22.5	36
GD125020ML	Sintetico	12	7~13.2	4300	11.0	4.0	100	1.20	50000	2	25.0	36
GD125020HL	Sintetico	12	7~13.2	5300	13.2	4.7	130	1.56	50000	1	30.0	36
GD125020LB	2BALL	12	7~13.2	3900	10.0	2.5	60	0.72	80000	3	23.5	36
GD125020MB	2BALL	12	7~13.2	4800	12.2	4.0	90	1.08	80000	2	28.0	36
GD125020HB	2BALL	12	7~13.2	5600	14.0	5.5	110	1.32	75000	1	32.5	36