




60X60X10mm




General Specifications

Airflow	17.3~23.3 CFM
Static Pressure	2.1~4.0 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

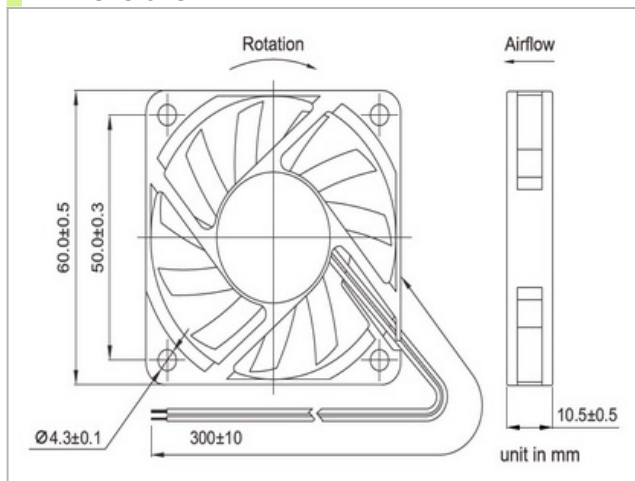

Performace

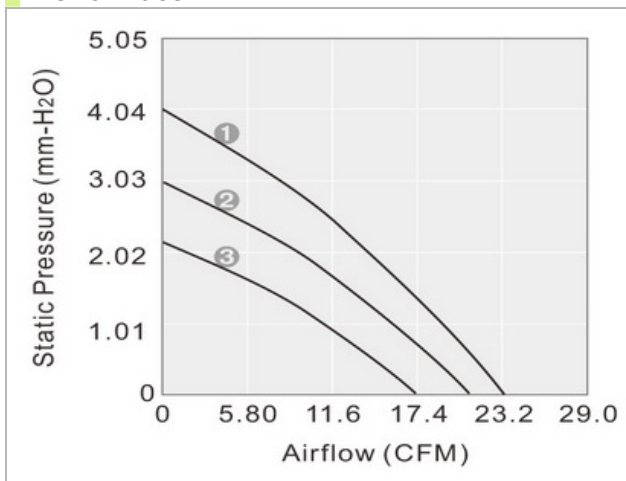

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD056010LB	2BALL	5	4~5.5	3800	17.3	2.1	260	1.30	80000	3	33.0	26
GD126010LB	2BALL	12	7~13.2	3800	17.3	2.1	140	1.68	80000	3	33.0	26
GD126010MB	2BALL	12	7~13.2	4500	21.0	3.0	170	2.04	80000	2	38.0	26
GD126010HB	2BALL	12	7~13.2	5200	23.3	4.0	240	2.88	75000	1	41.0	26
GD126010HL	Sintetico	12	7~13.2	5200	23.3	4.0	175	2.10	50000	1	41.0	26
GD126010LS	SLEEVE	12	7~13.2	3800	17.3	2.1	140	1.68	30000	3	37.5	26
GD126010MS	SLEEVE	12	7~13.2	4500	21.0	3.0	170	2.04	30000	2	38.0	26
GD126010HS	SLEEVE	12	7~13.2	5200	23.3	4.0	240	2.88	25000	1	41.0	26