


60X60X20mm




General Specifications

Airflow	17.0~29.1 CFM
Static Pressure	2.4~7.0 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

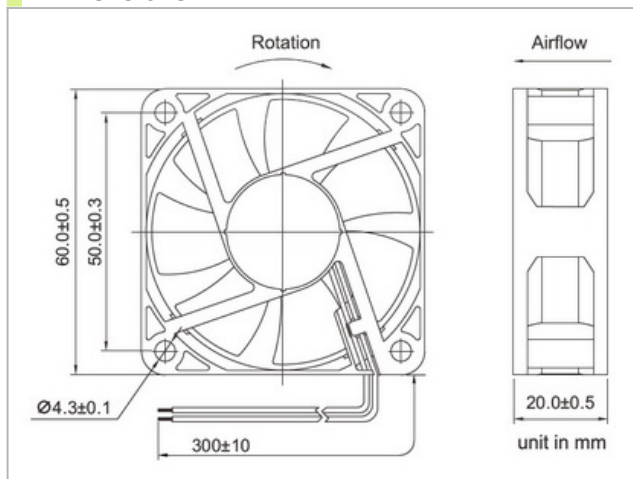

Performance

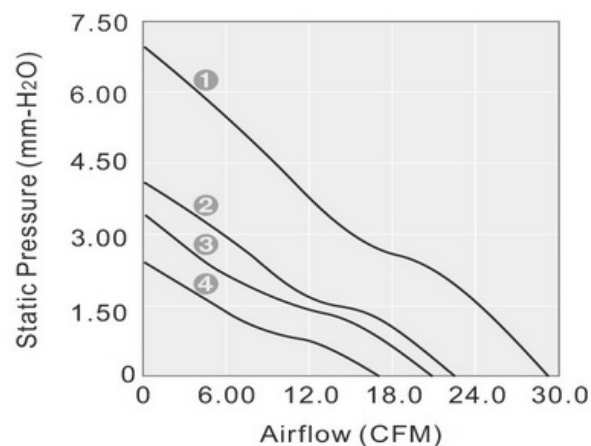

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD126020LB	2BALL	12	7~13.2	3000	17.0	2.4	80	0.96	80000	4	26.0	44
GD126020MB	2BALL	12	7~13.2	3600	20.0	3.4	110	1.32	80000	3	30.0	44
GD126020HB	2BALL	12	7~13.2	4200	22.9	4.4	160	1.92	75000	2	35.0	44
GD126020EB	2BALL	12	7~13.2	5300	29.1	7.0	280	3.36	65000	1	41.0	44
GD126020LS	SLEEVE	12	7~13.2	2800	15.2	2.0	80	0.96	30000	4	25.0	44
GD126020MS	SLEEVE	12	7~13.2	3400	18.0	2.7	110	1.32	30000	3	28.0	44
GD126020HS	SLEEVE	12	7~13.2	4000	21.8	4.0	160	1.92	25000	2	35.0	44
GD126020ES	SLEEVE	12	7~13.2	5300	29.2	7.0	250	3.00	25000	1	41.0	44
GD246020LB	2BALL	24	12~26.4	3000	17.0	2.4	40	0.96	80000	4	26.0	44
GD246020MB	2BALL	24	12~26.4	3600	20.0	3.4	70	1.68	80000	3	30.0	44
GD246020HB	2BALL	24	12~26.4	4200	22.9	4.4	80	1.92	75000	2	35.0	44
GD246020MS	SLEEVE	24	12~26.4	3400	18.0	2.7	70	1.68	30000	3	28.0	44
GD246020HS	SLEEVE	24	12~26.4	4000	21.8	4.0	80	1.92	25000	2	35.0	44