




60X60X25mm




General Specifications

Airflow	14.4~50.2 CFM
Static Pressure	5.0~27.6 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

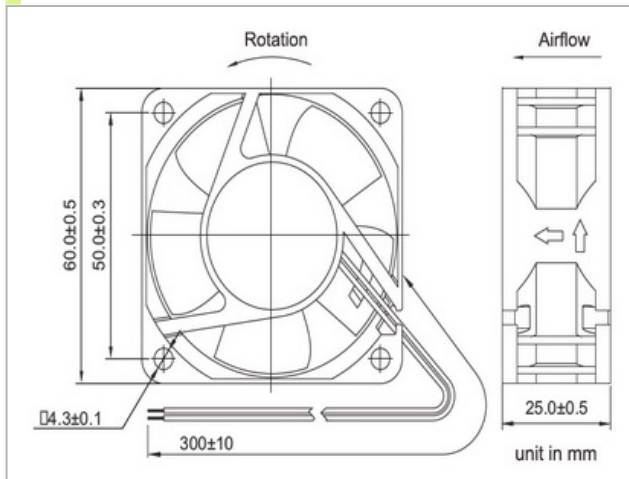

Performance

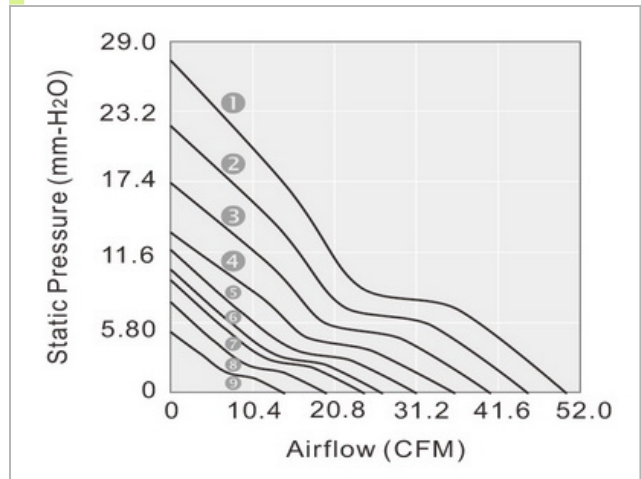

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD126025LB-W	2BALL	12	7~13.2	3000	14.4	5.0	50	0.60	80000	9	25.0	56
GD126025MB-W	2BALL	12	7~13.2	4100	19.7	7.5	80	0.96	80000	8	31.0	56
GD126025HB-W	2BALL	12	7~13.2	5100	24.5	9.3	120	1.44	75000	7	36.0	56
GD126025EB-W	2BALL	12	7~13.2	5600	26.9	10.2	150	1.80	65000	6	38.1	56
GD126025EB-W	2BALL	12	7~13.2	6500	31.2	11.8	190	2.28	65000	5	41.0	56
GD126025UB-W	2BALL	12	7~13.2	7500	35.9	13.2	300	3.60	65000	4	44.5	56
GD126025UB-W	2BALL	12	7~13.2	8500	40.6	17.4	420	5.04	65000	3	47.0	56
GD126025UB-W	2BALL	12	7~13.2	9500	45.4	22.2	630	7.56	65000	2	49.5	56
GD126025UB-W	2BALL	12	7~13.2	10500	50.2	27.6	900	10.80	65000	1	51.5	56
GD246025LB-W	2BALL	24	12~26.4	3000	14.4	5.0	35	0.84	80000	9	25.0	56
GD246025MB-W	2BALL	24	12~26.4	4100	19.7	7.5	55	1.32	80000	8	31.0	56
GD246025HB-W	2BALL	24	12~26.4	5100	24.5	9.3	75	1.80	75000	7	36.0	56
GD246025EB-W	2BALL	24	12~26.4	6500	31.2	11.8	110	2.64	65000	5	41.0	56
GD246025UB-W	2BALL	24	12~26.4	10500	50.2	27.6	410	9.84	65000	1	51.5	56
GD486025LB-W	2BALL	48	24~56.0	3000	14.4	5.0	30	1.44	80000	9	25.0	56
GD486025MB-W	2BALL	48	24~56.0	4100	19.7	7.5	40	1.92	80000	8	31.0	56
GD486025HB-W	2BALL	48	24~56.0	5100	24.5	9.3	55	2.64	75000	7	36.0	56
GD486025EB-W	2BALL	48	24~56.0	6800	32.7	12.4	80	3.84	65000	5	42.0	56
GD486025UB-W	2BALL	48	24~56.0	10500	50.2	27.6	240	11.52	65000	1	51.5	56