




# 60X60X38mm




## General Specifications

|                 |                                  |
|-----------------|----------------------------------|
| Airflow         | 26.7~45.5 CFM                    |
| Static Pressure | 8.1~22.9 mm-H <sub>2</sub> O     |
| Housing         | Plastic Material UL 94V-0 P.B.T. |
| Blade           | Plastic Material UL 94V-0 P.B.T. |
| Lead Wire       | UL1007 #24 AWG                   |

## Dimensions:mm

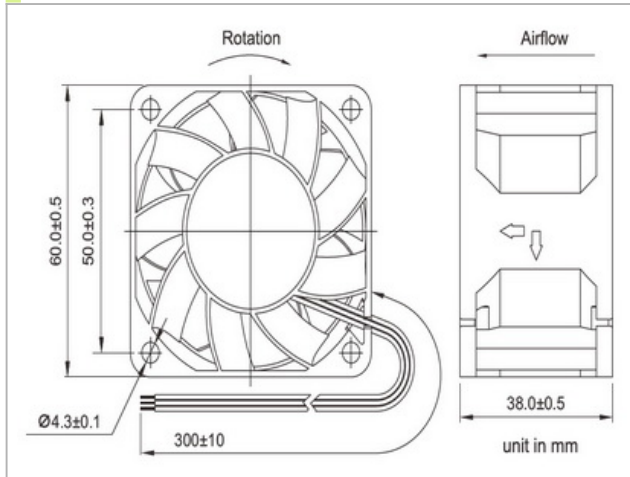

## Performance

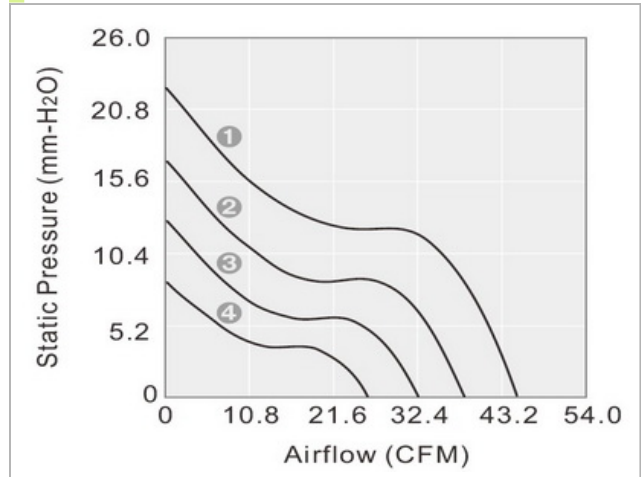

## Specifications

| Model NO.    | Bearing | Rated Voltage<br>VDC | Operating Voltage Range<br>VDC | Speed<br>RPM | Airflow<br>CFM | Static Pressure<br>mm-H <sub>2</sub> O | Current<br>mA | Power<br>W | Life at 40°C L10<br>HOUR | P-Q Curve | Noise<br>dBA | Weight<br>g |
|--------------|---------|----------------------|--------------------------------|--------------|----------------|----------------------------------------|---------------|------------|--------------------------|-----------|--------------|-------------|
| GD126038LB-P | 2BALL   | 12                   | 7~13.2                         | 4500         | 26.7           | 8.1                                    | 190           | 2.28       | 80000                    | 4         | 41.0         | 115.6       |
| GD126038MB-P | 2BALL   | 12                   | 7~13.2                         | 5500         | 32.6           | 12.2                                   | 260           | 3.12       | 80000                    | 3         | 47.0         | 115.6       |
| GD126038HB-P | 2BALL   | 12                   | 7~13.2                         | 6500         | 38.5           | 16.5                                   | 450           | 5.40       | 75000                    | 2         | 51.0         | 115.6       |
| GD126038EB-P | 2BALL   | 12                   | 7~13.2                         | 7500         | 45.5           | 22.9                                   | 720           | 8.64       | 65000                    | 1         | 55.0         | 115.6       |
| GD246038LB-P | 2BALL   | 24                   | 12~26.4                        | 4500         | 26.7           | 8.1                                    | 110           | 2.64       | 80000                    | 4         | 41.0         | 115.6       |
| GD246038MB-P | 2BALL   | 24                   | 12~26.4                        | 5500         | 32.6           | 12.2                                   | 170           | 4.08       | 80000                    | 3         | 47.0         | 115.6       |
| GD246038HB-P | 2BALL   | 24                   | 12~26.4                        | 6500         | 38.5           | 16.5                                   | 250           | 6.00       | 75000                    | 2         | 51.0         | 115.6       |
| GD246038EB-P | 2BALL   | 24                   | 12~26.4                        | 7500         | 45.5           | 22.9                                   | 360           | 8.64       | 65000                    | 1         | 55.0         | 115.6       |
| GD486038LB-P | 2BALL   | 48                   | 24~56.0                        | 4500         | 26.7           | 8.1                                    | 70            | 3.36       | 80000                    | 4         | 41.0         | 115.6       |
| GD486038MB-P | 2BALL   | 48                   | 24~56.0                        | 5500         | 32.6           | 12.2                                   | 90            | 4.32       | 80000                    | 3         | 47.0         | 115.6       |
| GD486038HB-P | 2BALL   | 48                   | 24~56.0                        | 6500         | 38.5           | 16.5                                   | 130           | 6.24       | 75000                    | 2         | 51.0         | 115.6       |
| GD486038EB-P | 2BALL   | 48                   | 24~56.0                        | 7500         | 45.5           | 22.9                                   | 190           | 9.12       | 65000                    | 1         | 55.0         | 115.6       |