




70X70X10mm




General Specifications

Airflow	14.9~31.0 CFM
Static Pressure	2.3~4.8 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

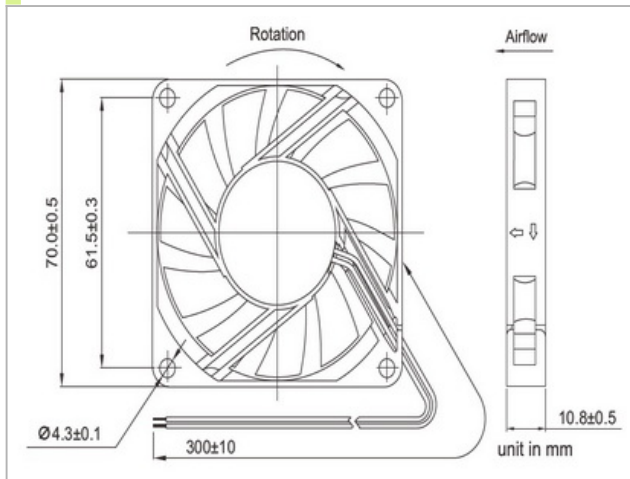

Performance

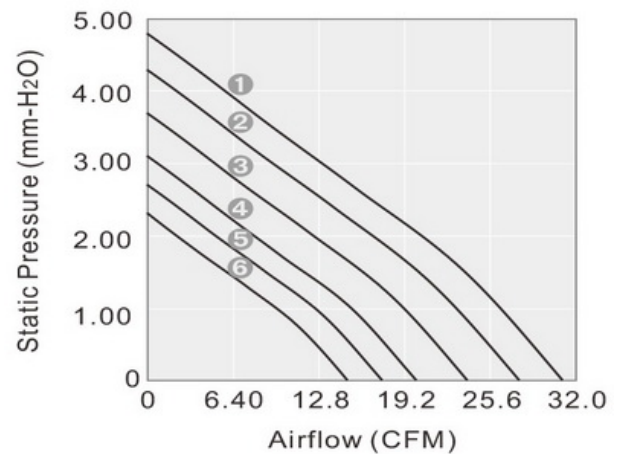

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD057010LB-H	2BALL	5	4~5.5	2300	14.9	2.3	160	0.80	80000	6	20.5	35
GD057010MB-H	2BALL	5	4~5.5	2700	17.5	2.7	200	1.00	80000	5	24.0	35
GD057010HB-H	2BALL	5	4~5.5	3100	20.1	3.1	270	1.35	75000	4	27.0	35
GD127010LB-H	2BALL	12	7~13.2	3700	23.9	3.7	130	1.56	80000	3	31.0	35
GD127010MB-H	2BALL	12	7~13.2	4300	27.8	4.3	170	2.04	80000	2	34.5	35
GD127010HB-H	2BALL	12	7~13.2	4800	31.0	4.8	250	3.00	75000	1	37.0	35