




70X70X25mm




General Specifications

Airflow	25.0~49.0 CFM
Static Pressure	3.0~10.06 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

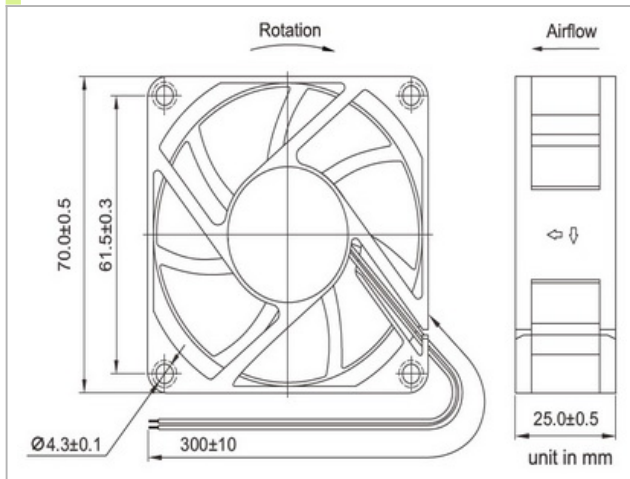

Performance

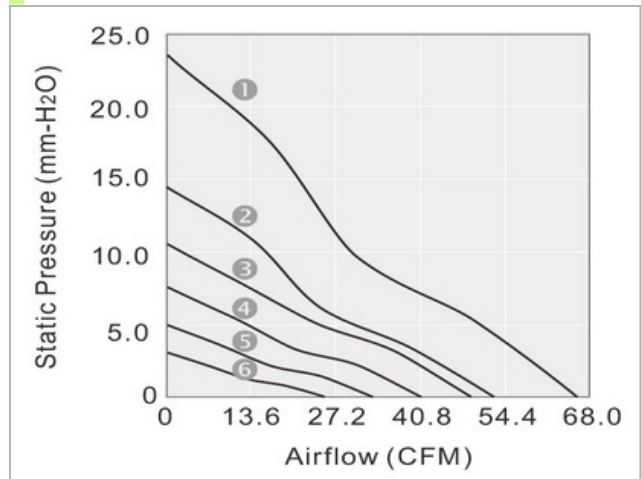

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD127025LB	2BALL	12	7~13.2	3000	25.8	3.1	90	1.08	80000	4	29.0	82
GD127025MB	2BALL	12	7~13.2	4000	33.1	5.0	170	2.04	80000	3	34.5	82
GD127025HB	2BALL	12	7~13.2	5000	40.5	7.2	300	3.60	75000	2	41.0	82
GD127025EB	2BALL	12	7~13.2	6000	49.0	10.6	400	4.80	65000	1	47.0	82
GD127025UB	2BALL	12	7~13.2	8200	66.3	23.6	700	8.40	65000	1	55.0	82
GD127025LL	Sintetico	12	7~13.2	3000	25.8	3.1	70	0.84	50000	4	29.0	82
GD127025ML	Sintetico	12	7~13.2	4000	33.1	5.0	125	1.50	50000	3	34.5	82
GD127025HL	Sintetico	12	7~13.2	5000	40.9	7.6	210	2.52	50000	2	41.0	82
GD127025EL	Sintetico	12	7~13.2	6500	52.7	14.5	460	5.52	65000	1	49.7	82
GD127025LS	SLEEVE	12	7~13.2	2900	24.9	3.0	110	1.32	30000	4	28.0	82
GD127025MS	SLEEVE	12	7~13.2	3900	33.0	4.9	210	2.52	30000	3	33.5	82
GD127025HS	SLEEVE	12	7~13.2	4900	36.7	7.1	300	3.60	25000	2	40.0	82
GD127025ES	SLEEVE	12	7~13.2	5900	48.1	10.2	400	4.80	20000	1	46.0	82
GD247025LB	2BALL	24	12~26.4	3000	25.8	3.1	50	1.20	80000	4	29.0	82
GD247025MB	2BALL	24	12~26.4	3900	33.3	5.0	75	1.80	80000	3	33.5	82
GD247025HB	2BALL	24	12~26.4	5000	40.5	7.6	140	3.36	75000	2	41.0	82
GD247025EB	2BALL	24	12~26.4	6000	49.0	10.6	320	7.68	65000	1	47.0	82
GD247025LS	SLEEVE	24	12~26.4	3000	25.8	3.1	65	1.56	30000	4	29.0	82
GD247025MS	SLEEVE	24	12~26.4	4000	33.1	5.0	120	2.88	30000	3	34.5	82
GD247025HS	SLEEVE	24	12~26.4	5000	40.9	7.6	180	4.32	25000	2	41.0	82
GD247025ES	SLEEVE	24	12~26.4	6000	49.0	10.6	320	7.68	20000	1	47.0	82