




80X80X15mm




General Specifications

Airflow	23.5~50.2 CFM
Static Pressure	1.4~5.8 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

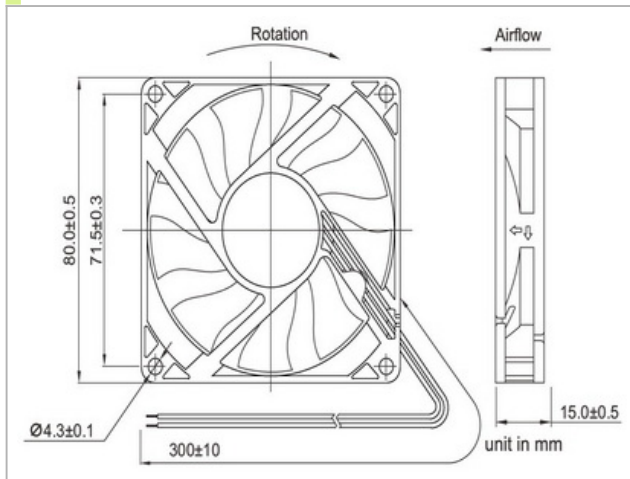

Performance

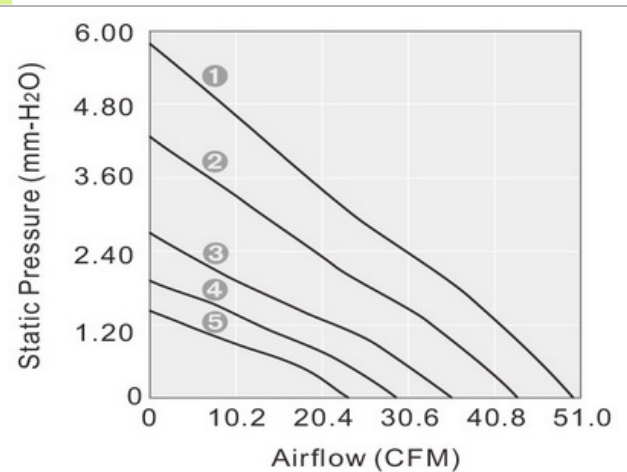

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD128015LB	2BALL	12	7~13.2	2100	23.5	1.4	70	0.84	80000	5	19.0	50
GD128015MB	2BALL	12	7~13.2	2600	29.1	1.9	100	1.20	80000	4	27.0	50
GD128015HB	2BALL	12	7~13.2	3200	35.8	2.7	190	2.28	75000	3	33.0	50
GD128015EB	2BALL	12	7~13.2	3900	43.6	4.3	250	3.00	65000	2	38.5	50
GD128015EB	2BALL	12	7~13.2	4500	50.2	5.8	380	4.56	65000	1	42.0	50
GD128015LL	Sintetico	12	7~13.2	2100	23.5	1.4	90	1.08	50000	5	19.0	50
GD128015ML	Sintetico	12	7~13.2	2600	29.1	1.9	140	1.68	50000	4	27.0	50
GD128015HL	Sintetico	12	7~13.2	3200	35.8	2.7	250	3.00	50000	3	30.5	50
GD128015EL	Sintetico	12	7~13.2	3900	43.6	4.3	330	3.96	50000	2	35.0	50