




80X80X25mm




General Specifications

Airflow	31.4~54.5 CFM
Static Pressure	2.0~5.9 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

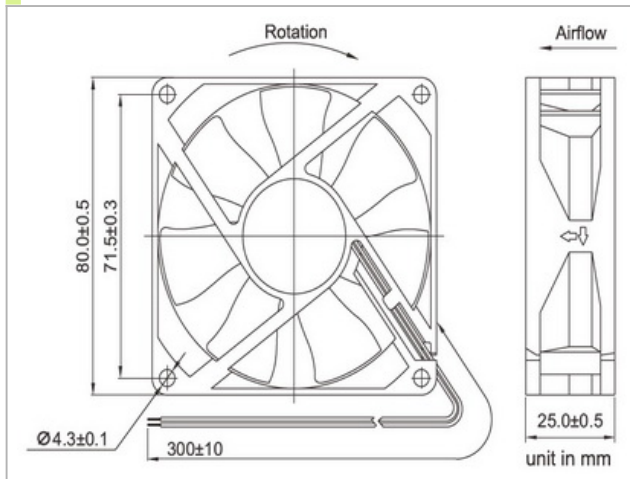

Performance

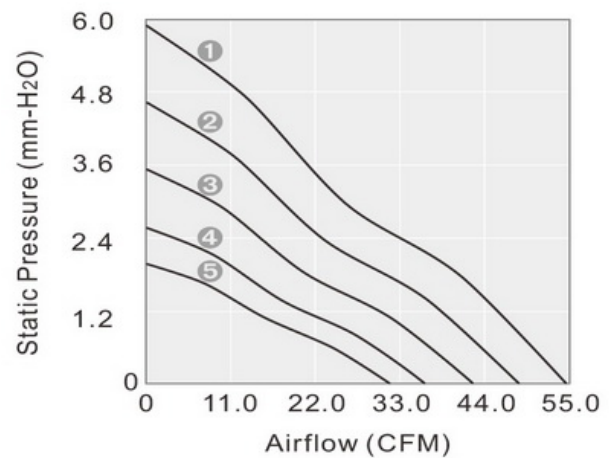

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD128025LB-E	2BALL	12	7~13.2	2000	31.4	2.0	100	1.20	80000	5	26.6	88
GD128025MB-E	2BALL	12	7~13.2	2300	36.2	2.6	130	1.56	80000	4	29.6	88
GD128025HB-E	2BALL	12	7~13.2	2700	42.3	3.5	190	2.28	75000	3	33.1	88
GD128025EB-E	2BALL	12	7~13.2	3100	48.4	4.6	280	3.36	65000	2	36.1	88
GD128025EB-E	2BALL	12	7~13.2	3500	54.5	5.9	300	3.60	65000	1	38.7	88
GD248025LB-E	2BALL	24	12~26.4	2000	31.4	2.0	55	1.32	80000	5	26.6	88
GD248025MB-E	2BALL	24	12~26.4	2300	36.2	2.6	70	1.68	80000	4	29.6	88
GD248025HB-E	2BALL	24	12~26.4	2700	42.3	3.5	90	2.16	75000	3	33.1	88
GE248025EB-E	2BALL	24	12~26.4	3100	48.4	4.6	130	3.12	65000	2	36.1	88
GD248025EB-E	2BALL	24	12~26.4	3500	54.5	5.9	140	3.36	65000	1	38.7	88
GD488025LB-E	2BALL	48	24~56.0	2000	31.4	2.0	40	1.92	80000	5	26.6	88
GD488025MB-E	2BALL	48	24~56.0	2300	36.2	2.6	50	2.40	80000	4	29.6	88
GD488025HB-E	2BALL	48	24~56.0	2700	42.3	3.5	70	3.36	75000	3	33.1	88
GD488025EB-E	2BALL	48	24~56.0	3100	48.4	4.6	90	4.32	65000	2	36.1	88
GD488025EB-E	2BALL	48	24~56.0	3500	54.5	5.9	110	5.28	65000	1	38.7	88