




80X80X25mm




General Specifications

Airflow	26.3~59.6 CFM
Static Pressure	2.0~8.8 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

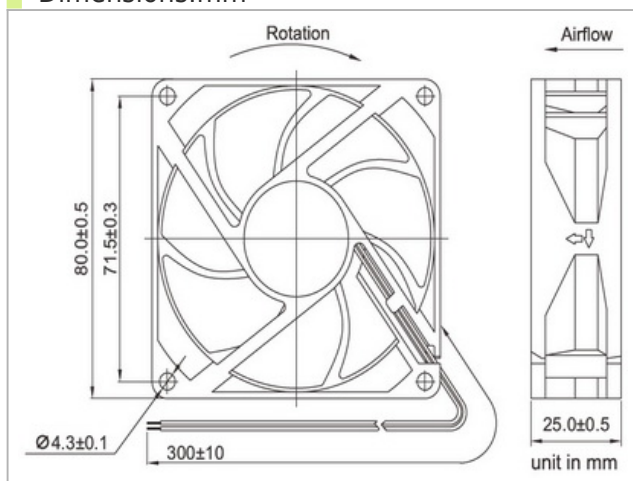

Performance

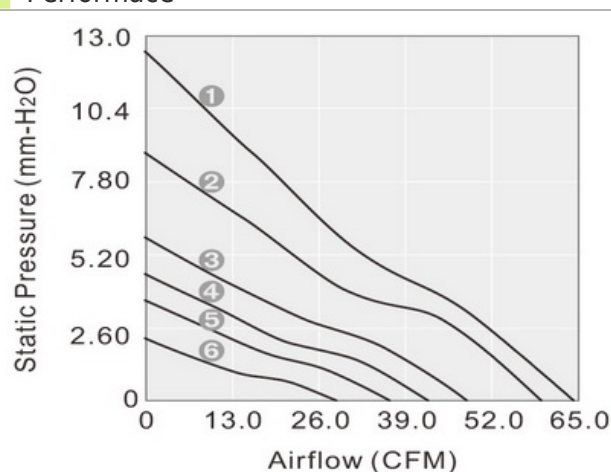

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD128025LS-N	SLEEVE	12	7~13.2	2100	26.3	2.0	80	0.96	30000	6	26.0	100
GD128025MS-N	SLEEVE	12	7~13.2	2600	32.7	3.1	130	1.56	30000	5	29.5	100
GD128025HS-N	SLEEVE	12	7~13.2	3200	40.4	3.9	200	2.40	25000	4	35.5	100
GD128025ES-N	SLEEVE	12	7~13.2	3500	46.0	5.2	250	3.00	20000	3	38.5	100
GD128025LB-N	2BALL	12	7~13.2	2300	28.8	2.2	80	0.96	80000	6	27.0	100
GD128025MB-N	2BALL	12	7~13.2	2900	36.9	3.6	130	1.56	80000	5	32.0	100
GD128025HB-N	2BALL	12	7~13.2	3400	41.7	4.5	140	1.68	75000	4	37.5	100
GD128025EB-N	2BALL	12	7~13.2	3700	48.5	5.8	250	3.00	65000	3	39.5	100
GD128025EB-N	2BALL	12	7~13.2	4500	59.6	8.8	280	3.36	65000	2	44.0	100
GD128025UB-N	2BALL	12	7~13.2	5500	64.1	12.5	500	6.00	65000	1	48.0	100
GD248025LB-N	2BALL	24	12~26.4	2300	28.8	2.2	60	1.44	80000	6	27.0	100
GD248025MB-N	2BALL	24	12~26.4	2900	36.9	3.6	80	1.92	80000	5	32.0	100
GD248025HB-N	2BALL	24	12~26.4	3400	41.7	4.5	100	2.40	75000	4	37.5	100
GD248025EB-N	2BALL	24	12~26.4	3700	48.5	5.8	110	2.64	65000	3	39.5	100
GD248025EB-N	2BALL	24	12~26.4	4500	59.6	8.8	200	4.80	65000	2	44.0	100
GD488025MB-N	2BALL	48	24~56.0	2900	36.9	3.6	45	2.16	80000	5	32.0	100
GD488025HB-N	2BALL	48	24~56.0	3400	41.7	4.5	80	3.84	75000	4	37.5	100
GD488025EB-N	2BALL	48	24~56.0	3700	48.5	5.9	90	4.08	75000	3	39.5	100