




92X92X25mm




General Specifications

Airflow	45.8~73.4 CFM
Static Pressure	3.1~7.2 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

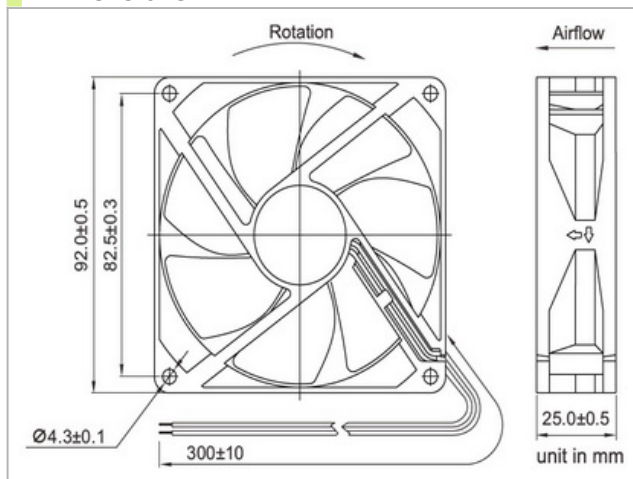

Performace

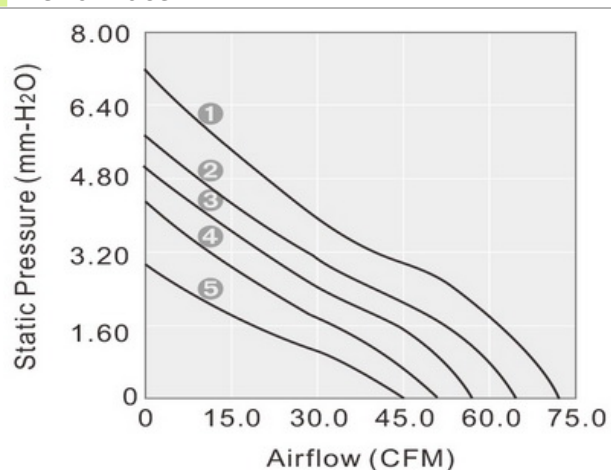

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD129225LS	SLEEVE	12	7~13.2	2400	45.8	3.1	150	1.80	30000	5	32.5	100
GD129225MS	SLEEVE	12	7~13.2	2800	53.5	4.3	220	2.64	30000	4	38.0	100
GD129225HS	SLEEVE	12	7~13.2	3100	58.6	5.2	260	3.12	25000	3	40.0	100
GD129225ES	SLEEVE	12	7~13.2	3500	67.3	5.9	340	4.08	20000	2	43.0	100
GD129225ES	SLEEVE	12	7~13.2	3800	73.4	7.3	470	5.64	20000	1	45.5	100
GD129225LB	2BALL	12	7~13.2	2400	45.8	3.1	150	1.80	80000	5	32.5	100
GD129225MB	2BALL	12	7~13.2	2800	53.5	4.3	220	2.64	80000	4	38.0	100
GD129225HB	2BALL	12	7~13.2	3100	58.6	5.2	260	3.12	75000	3	40.0	100
GD129225EB	2BALL	12	7~13.2	3500	67.3	5.9	340	4.08	65000	2	43.0	100
GD129225EB	2BALL	12	7~13.2	3800	73.4	7.2	470	5.64	65000	1	45.5	100
GD249225LB	2BALL	24	12~26.4	2400	45.8	3.1	90	2.16	80000	5	32.5	100
GD249225MB	2BALL	24	12~26.4	2800	53.5	4.3	120	2.88	80000	4	38.0	100
GD249225HB	2BALL	24	12~26.4	3100	58.6	5.2	160	3.84	75000	3	40.0	100
GD249225EB	2BALL	24	12~26.4	3500	67.3	5.9	200	4.80	65000	2	43.0	100
GD249225EB	2BALL	24	12~26.4	3800	73.4	7.3	270	6.48	65000	1	45.5	100
GD489225LB	2BALL	48	24~56.0	2400	45.8	3.1	55	2.64	80000	5	32.5	100
GD489225MB	2BALL	48	24~56.0	2800	53.5	4.3	80	3.84	80000	4	38.0	100
GD489225HB	2BALL	48	24~56.0	3100	58.6	5.2	100	4.80	75000	3	40.0	100
GD489225EB	2BALL	48	24~56.0	3500	67.3	5.9	150	7.20	65000	2	43.0	100