




120X120X32mm




General Specifications

Airflow	87.7~234.3 CFM
Static Pressure	4.2~24.4 mm-H ₂ O
Blade	Plastic Material UL 94V-0 P.B.T.
Frame	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #22 AWG

Dimensions:mm

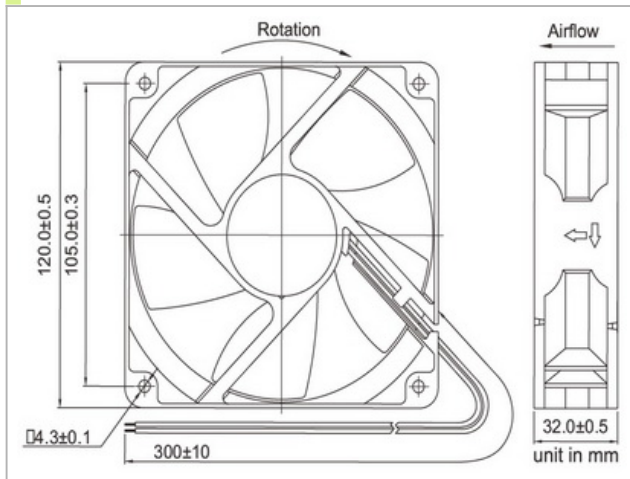

Performance

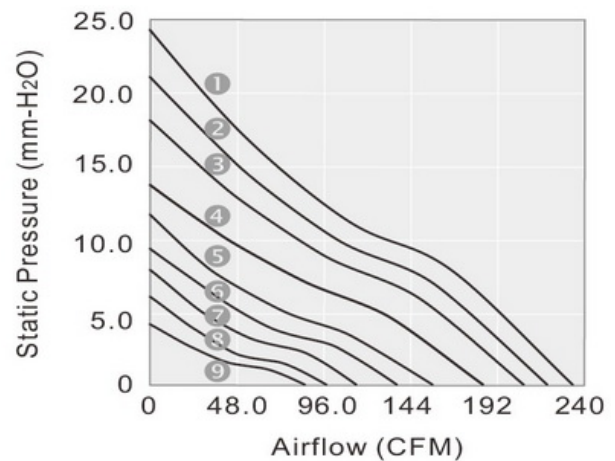

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C L10	P-Q Curve	Noise	Weight
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	HOURL		dBA	g
GD121232LB	2BALL	12	7~13.2	2100	87.7	4.2	330	3.96	80000	9	39.0	219
GD121232MB	2BALL	12	7~13.2	2500	99.3	6.1	450	5.40	80000	8	42.5	219
GD121232HB	2BALL	12	7~13.2	2900	115.0	8.0	580	6.96	75000	7	47.5	219
GD121232EB	2BALL	12	7~13.2	3300	137.3	9.4	840	10.08	65000	6	49.0	219
GD121232EB	2BALL	12	7~13.2	3500	157.7	11.8	700	8.40	65000	5	55.0	219
GD121232EB	2BALL	12	7~13.2	4100	184.8	13.8	1100	13.20	65000	4	58.5	219
GD121232UB	2BALL	12	7~13.2	4600	207.3	18.2	1600	19.20	65000	3	61.0	219
GD121232SB	2BALL	12	7~13.2	4900	220.8	21.2	2200	26.40	60000	2	62.0	219
GD241232LB	2BALL	24	12~26.4	2100	87.7	4.2	150	3.60	80000	9	39.0	219
GD241232MB	2BALL	24	12~26.4	2500	99.3	6.1	200	4.80	80000	8	42.5	219
GD241232HB	2BALL	24	12~26.4	2900	115.0	8.0	290	6.96	75000	7	47.5	219
GD241232EB	2BALL	24	12~26.4	3500	157.7	11.8	360	8.64	65000	5	55.0	219
GD241232UB	2BALL	24	12~26.4	4600	207.3	18.2	750	18.00	65000	3	61.0	219
GD241232SB	2BALL	24	12~26.4	5200	234.3	24.4	1000	24.00	60000	1	63.5	219
GD481232LB	2BALL	48	24~56.0	2100	83.3	4.3	90	4.32	80000	9	39.5	219
GD481232MB	2BALL	48	24~56.0	2500	99.3	6.1	130	6.24	80000	8	42.5	219
GD481232HB	2BALL	48	24~56.0	2900	115.0	8.0	190	9.12	75000	7	47.0	219
GD481232EB	2BALL	48	24~56.0	3500	157.7	11.8	210	10.08	65000	5	55.0	219
GD481232UB	2BALL	48	24~56.0	4600	207.3	18.2	450	21.60	65000	3	61.0	219
GD481232SB	2BALL	48	24~56.0	5200	234.3	24.4	600	28.80	60000	1	63.5	219