




120X120X38mm




General Specifications

Airflow	88.0~142.0 CFM
Static Pressure	8.4~20.0 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #22 AWG

Dimensions:mm

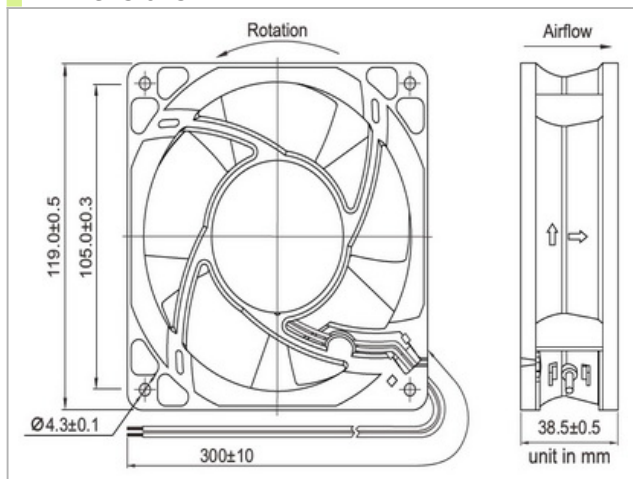

Performance

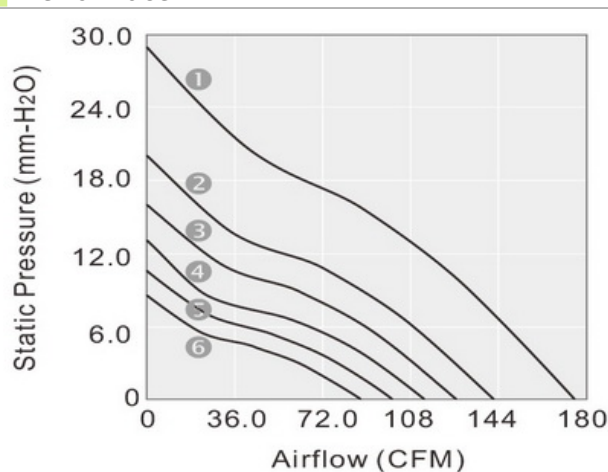

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD121238LB-R	2BALL	12	7~13.2	2800	88.0	8.4	270	3.24	80000	5	45.5	396.8
GD121238MB-R	2BALL	12	7~13.2	3200	100.9	10.5	360	4.32	80000	4	47.0	396.8
GD121238HB-R	2BALL	12	7~13.2	3600	113.9	13.0	520	6.24	75000	3	51.0	396.8
GD121238EB-R	2BALL	12	7~13.2	4000	127.0	16.0	700	8.40	65000	2	55.0	396.8
GD121238EB-R	2BALL	12	7~13.2	4500	142.0	20.2	950	11.40	65000	1	58.5	396.8
GD241238LB-R	2BALL	24	12~26.4	2800	88.0	8.4	145	3.48	80000	5	45.5	396.8
GD241238MB-R	2BALL	24	12~26.4	3200	100.9	10.5	195	4.68	80000	4	47.0	396.8
GD241238HB-R	2BALL	24	12~26.4	3600	113.9	13.0	270	6.48	75000	3	51.0	396.8
GD241238EB-R	2BALL	24	12~26.4	4000	127.0	16.0	370	8.88	65000	2	55.0	396.8
GD241238EB-R	2BALL	24	12~26.4	4500	142.0	20.2	520	12.48	65000	1	58.5	396.8
GD481238LB-R	2BALL	48	24~56.0	2800	88.0	8.4	100	4.80	80000	5	45.5	396.8
GD481238MB-R	2BALL	48	24~56.0	3200	100.9	10.5	130	6.24	80000	4	47.0	396.8
GD481238HB-R	2BALL	48	24~56.0	3600	113.9	13.0	170	8.16	75000	3	51.0	396.8
GD481238EB-R	2BALL	48	24~56.0	4000	127.0	16.0	200	9.60	65000	2	55.0	396.8
GD481238EB-R	2BALL	48	24~56.0	4500	142.0	20.0	270	12.96	65000	1	58.5	396.8
GD481238EB-R	2BALL	48	24~56.0	5500	174.7	28.9	560	26.88	65000	1	65.0	250.0