




127X127X38mm




General Specifications

Airflow	85~140 CFM
Static Pressure	0.28~0.35 Inch-H ₂ O
Blade	Plastic Material UL 94V-0 P.B.T.
Frame	Die Cast Aluminum Painted Black
Lead Wire	UL1007 #22 AWG

Dimensions:mm

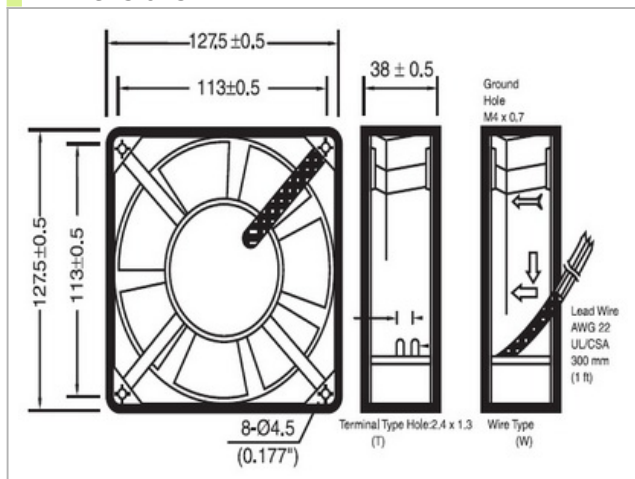

Performance

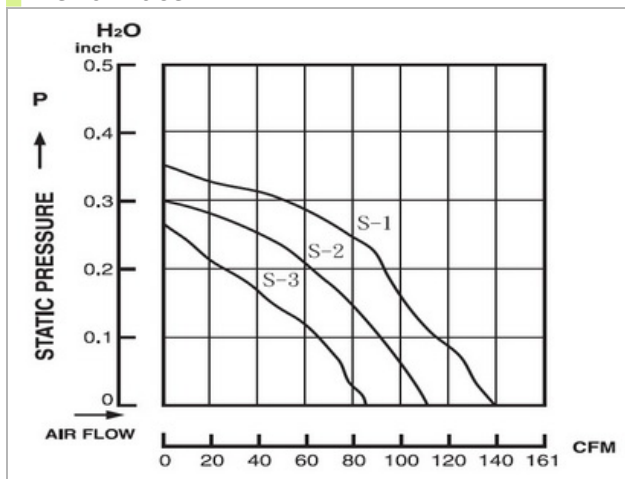

Specifications

Model NO.	Bearing	Rated Voltage	Speed		Airflow	Static Pressure		Current Power Noise		
		VDC	RPM			Inch-H ₂ O		A	W	dBA
GD1212738HB	2BALL	12	3000		140	0.35		0.48	5.76	45
GD1212738MB	2BALL	12	2500		110	0.30		0.35	4.2	38
GD1212738LB	2BALL	12	2000		85	0.28		0.25	3.00	32
GD2412738HB	2BALL	24	3000		140	0.35		0.33	7.92	45
GD2412738MB	2BALL	24	2500		110	0.30		0.25	6.00	38
GD2412738LB	2BALL	24	2000		85	0.28		0.20	4.80	32
GD4812738HB	2BALL	48	3000		140	0.35		0.25	12.00	45
GD4812738MB	2BALL	48	2500		110	0.30		0.22	10.56	38
GD4812738LB	2BALL	48	2000		85	0.28		0.18	8.64	32