




120X120X38mm




General Specifications

Airflow	149.7~256.5 CFM
Static Pressure	18.3~39.9 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

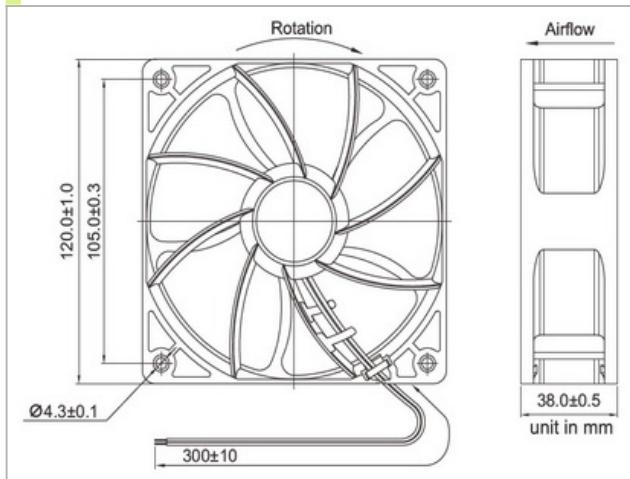

Performance

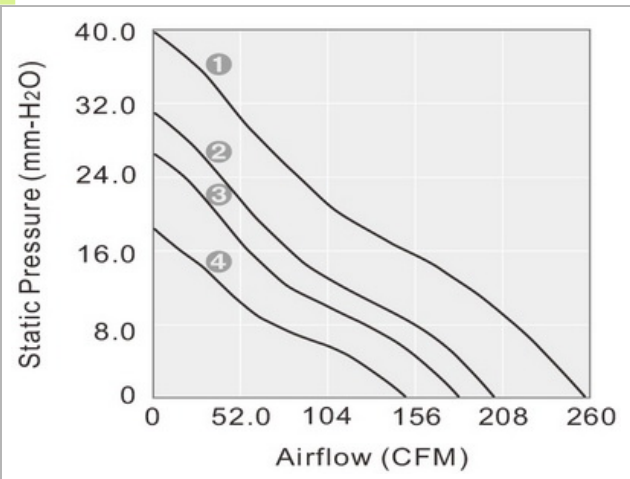

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD121238LB-S	2BALL	12	7~13.2	5000	149.7	18.3	600	7.20	60000	4	61.8	252.5
GD121238MB-S	2BALL	12	7~13.2	6000	182.2	26.6	900	10.80	60000	3	63.5	252.5
GD121238HB-S	2BALL	12	7~13.2	7000	203.2	31.1	1150	13.80	60000	2	64.7	252.5
GD121238EB-S	2BALL	12	7~13.2	8500	237.5	39.9	2200	26.40	60000	1	69.1	252.5
GD241238LB-S	2BALL	24	11~28.0	5000	149.7	18.3	300	7.20	60000	4	61.8	252.5
GD241238MB-S	2BALL	24	11~28.0	6000	182.2	26.6	450	10.80	60000	3	63.5	252.5
GD241238HB-S	2BALL	24	11~28.0	7000	203.2	31.1	700	16.80	60000	2	64.7	252.5
GD241238EB-S	2BALL	24	11~28.0	8500	237.5	39.9	1100	26.40	60000	1	69.1	252.5
GD481238LB-S	2BALL	48	36~56.0	5000	149.7	18.3	170	8.16	60000	4	61.8	252.5
GD481238MB-S	2BALL	48	36~56.0	6000	182.2	26.6	250	12.00	60000	3	63.5	252.5
GD481238HB-S	2BALL	48	36~56.0	7000	203.2	31.1	360	17.28	60000	2	64.7	252.5
GD481238EB-S	2BALL	48	36~56.0	8500	237.5	39.9	600	28.80	60000	1	69.1	252.5