


50X50X10mm




General Specifications

Airflow	2.4~3.3 CFM
Static Pressure	6.1~11.5 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1571 #28 AWG

Dimensions:mm

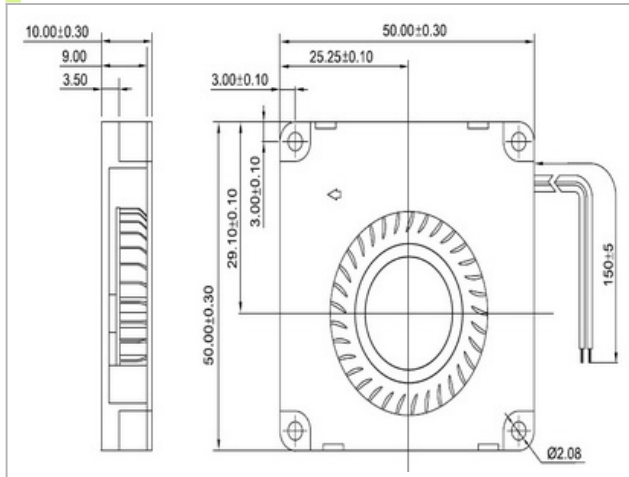

Performance

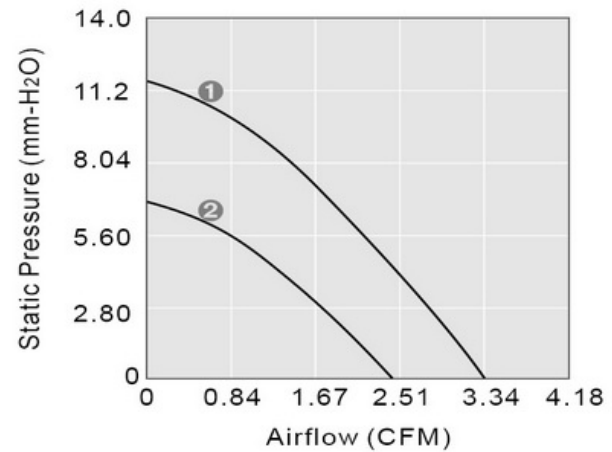

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10	P-Q Curve	Noise dBA	Weight g
GB055010MB	2BALL	5	4~5.5	5000	2.4	6.1	130	0.65	80000	2	27.0	17.5
GB055010HB	2BALL	5	4~5.5	6500	3.3	11.5	170	0.85	75000	1	32.0	17.5
GB125010MB	2BALL	12	7~13.2	5000	2.4	6.1	55	0.66	80000	2	27.0	17.5
GB125010HB	2BALL	12	7~13.2	6500	3.3	11.5	100	1.20	75000	1	32.0	17.5