


50X50X15mm




General Specifications

Airflow	3.9~6.3 CFM
Static Pressure	12.0~26.2 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

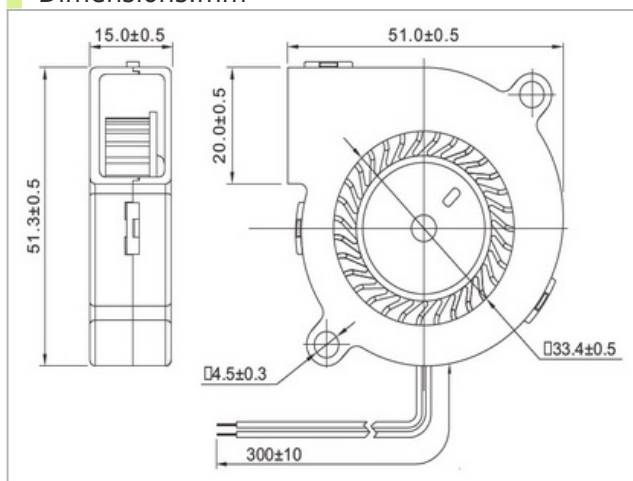

Performance

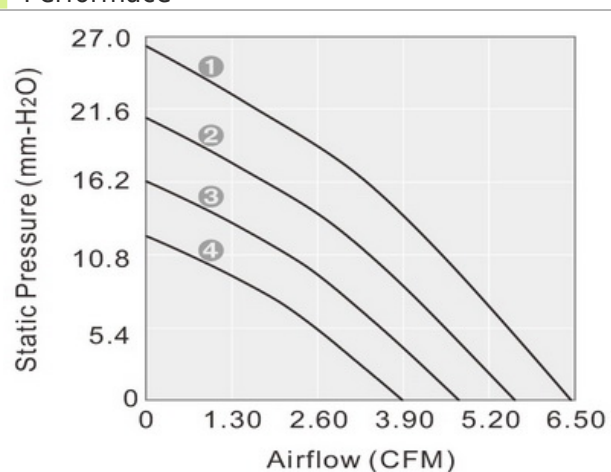

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GB055115LB	2BALL	5	4~5.5	4500	3.9	12.0	170	0.85	80000	4	37.5	28
GB055115MB	2BALL	5	4~5.5	5500	4.7	16.2	350	1.75	80000	3	42.0	28
GB125115LB	2BALL	12	7~13.2	4500	3.9	12.0	95	1.14	80000	4	37.5	28
GB125115MB	2BALL	12	7~13.2	5500	4.7	16.2	160	1.92	80000	3	42.0	28
GB125115HB	2BALL	12	7~13.2	6500	5.5	20.9	230	2.76	75000	2	45.5	28
GB125115EB	2BALL	12	7~13.2	7500	6.3	26.2	290	3.48	65000	1	48.5	28
GB125115LL	Sintetico	12	7~13.2	4500	3.9	12.0	100	1.20	50000	4	37.5	28
GB125115ML	Sintetico	12	7~13.2	5500	4.7	16.2	150	1.80	50000	3	42.0	28
GB125115HL	Sintetico	12	7~13.2	6500	5.5	20.9	220	2.64	50000	2	45.5	28
GB125115EL	Sintetico	12	7~13.2	7500	6.3	26.2	290	3.48	50000	1	48.5	28
GB245115LB	2BALL	24	12~26.4	4500	3.9	12.0	60	1.44	80000	4	37.5	28
GB245115MB	2BALL	24	12~26.4	5500	4.7	16.2	85	2.04	80000	3	42.0	28
GB245115HB	2BALL	24	12~26.4	6500	5.5	20.9	120	2.88	75000	2	45.5	28
GB245115EB	2BALL	24	12~26.4	7500	6.3	26.2	180	4.32	65000	1	48.5	28