




60X60X25mm




General Specifications

Airflow	6.5~10.6 CFM
Static Pressure	6.1~15.3 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

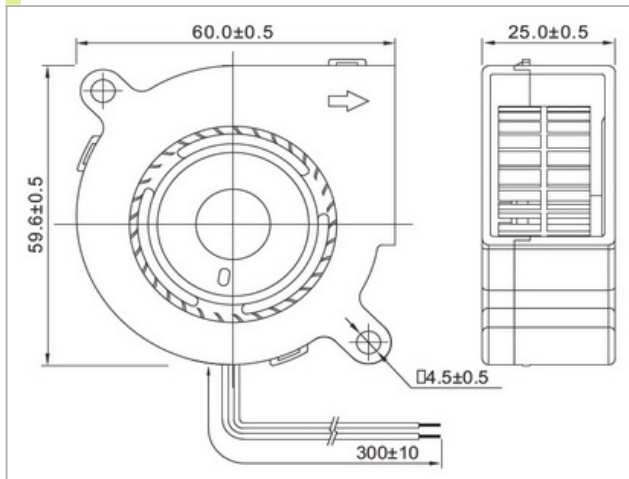

Performace

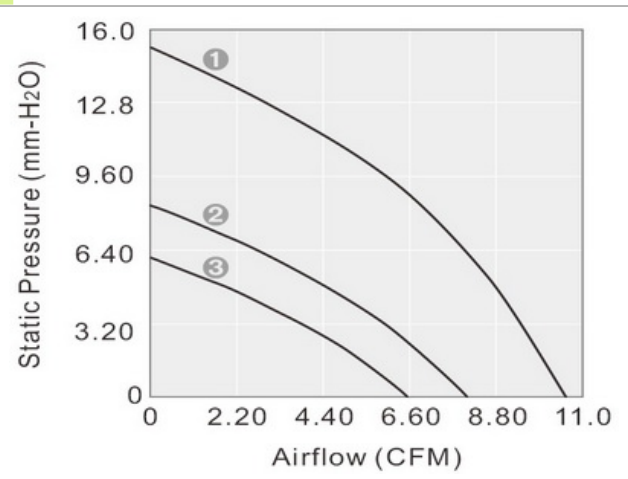

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GB126025LB	2BALL	12	7~13.2	3000	6.5	6.1	110	1.32	80000	3	31.5	63.6
GB126025MB	2BALL	12	7~13.2	3700	8.1	8.4	180	2.16	80000	2	35.8	63.6
GB126025HB	2BALL	12	7~13.2	4500	10.6	15.3	230	2.76	75000	1	41.0	63.6
GB246025LB	2BALL	24	12~26.4	3000	6.5	6.1	45	1.08	80000	3	31.5	63.6
GB246025MB	2BALL	24	12~26.4	3700	8.1	8.4	70	1.68	80000	2	35.8	63.6
GB246025HB	2BALL	24	12~26.4	4500	10.6	15.3	110	2.64	75000	1	41.5	63.6