


75X75X30mm




General Specifications

Airflow	9.7~17.3 CFM
Static Pressure	5.5~21.8 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

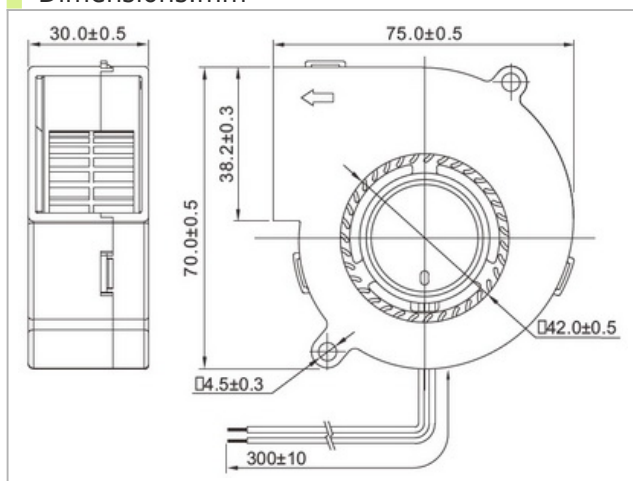

Performance

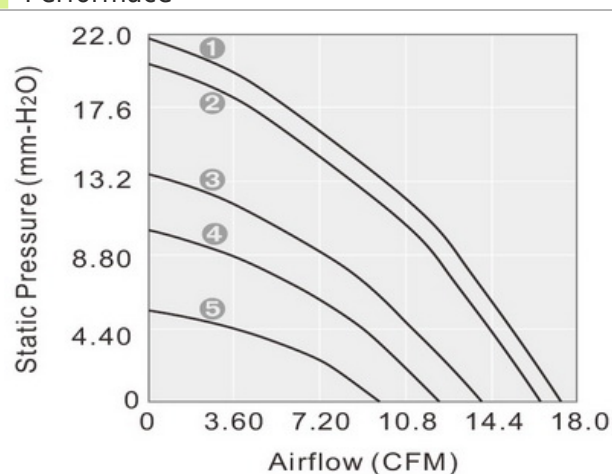

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GB127530LB	2BALL	12	7~13.2	2400	9.7	5.5	110	1.32	80000	5	37.0	88.9
GB127530MB	2BALL	12	7~13.2	3000	12.2	10.3	190	2.28	80000	4	42.0	88.9
GB127530HB	2BALL	12	7~13.2	3400	14.0	13.7	270	3.24	75000	3	44.5	88.9
GB127530EB	2BALL	12	7~13.2	4000	16.5	20.3	360	4.32	65000	2	48.0	88.9
GB127530EB	2BALL	12	7~13.2	4200	17.3	21.8	430	5.16	65000	1	49.5	88.9
GB127530LS	SLEEVE	12	7~13.2	2300	9.3	5.1	180	2.16	30000	5	36.0	88.9
GB127530MS	SLEEVE	12	7~13.2	2900	11.8	9.8	210	2.52	30000	4	41.0	88.9
GB127530HS	SLEEVE	12	7~13.2	3300	13.6	13.1	300	3.60	25000	3	43.5	88.9
GB247530LB	2BALL	24	12~26.4	2400	9.7	5.5	60	1.44	80000	5	37.0	88.9
GB247530MB	2BALL	24	12~26.4	3000	12.2	10.3	110	2.64	80000	4	42.0	88.9
GB247530HB	2BALL	24	12~26.4	3400	14.0	13.7	150	3.60	75000	3	44.5	88.9
GB247530EB	2BALL	24	12~26.4	4000	16.5	20.3	200	4.80	65000	2	48.0	88.9
GB247530LS	SLEEVE	24	12~26.4	2400	9.7	5.5	110	2.64	30000	5	37.0	88.9
GB247530MS	SLEEVE	24	12~26.4	3000	12.2	10.3	150	3.60	30000	4	42.0	88.9
GB247530HS	SLEEVE	24	12~26.4	3400	14.0	13.7	190	4.56	25000	3	44.5	88.9
GB247530ES	SLEEVE	24	12~26.4	4000	16.5	20.3	200	4.80	20000	2	48.0	88.9