


97X97X33mm




General Specifications

Airflow	25.6~32.4 CFM
Static Pressure	22.1~28.1 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

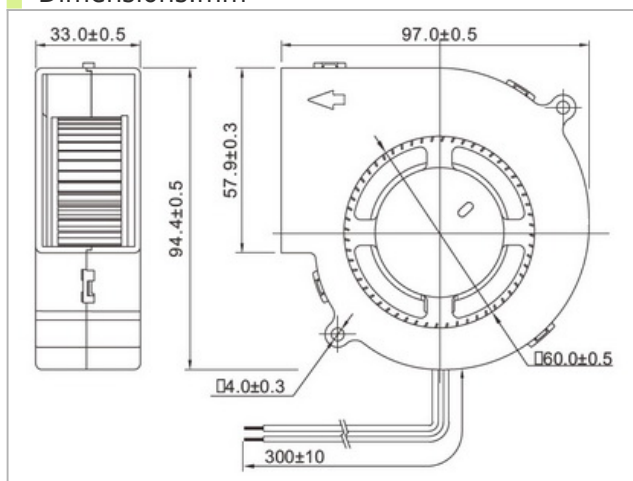

Performance

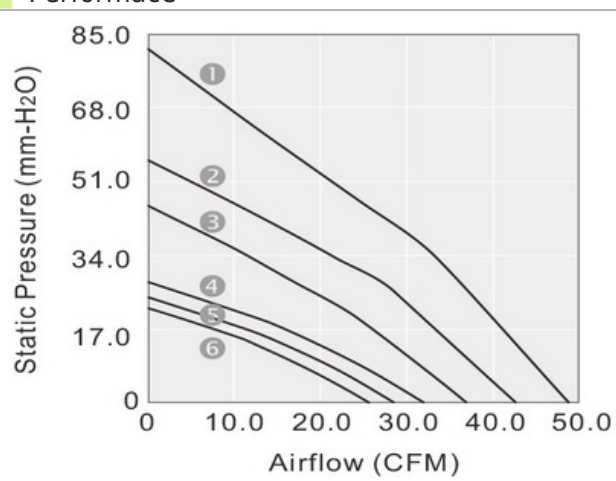

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C L10	P-Q Curve	Noise	Weight
		VDC	VDC	RPM	CFM	mm-H ₂ O	mA	W	HOURL		dBA	g
GB129733LB	2BALL	12	7~13.2	2600	25.6	22.1	400	4.80	80000	6	40.0	156.7
GB129733MB	2BALL	12	7~13.2	2900	28.5	24.7	480	5.76	80000	5	42.5	156.7
GB129733HB	2BALL	12	7~13.2	3300	32.4	28.1	740	8.88	75000	4	48.5	156.7
GB129733EB	2BALL	12	7~13.2	3700	34.2	29.4	850	10.20	65000	3	53.0	156.7
GB129733UB	2BALL	12	7~13.2	4500	42.6	56.0	1400	16.80	65000	2	58.0	156.7
GB249733LB	2BALL	24	12~26.4	2600	25.6	22.1	210	5.04	80000	6	40.0	156.7
GB249733MB	2BALL	24	12~26.4	2900	28.5	24.7	280	6.72	80000	5	42.5	156.7
GB249733HB	2BALL	24	12~26.4	3300	32.4	28.1	420	10.08	75000	4	48.5	156.7
GB249733EB	2BALL	24	12~26.4	3700	34.2	29.4	400	9.60	65000	3	53.0	156.7
GB249733UB	2BALL	24	12~26.4	4500	42.6	56.0	680	16.32	65000	2	58.0	156.7
GB249733SB	2BALL	24	12~26.4	5300	48.9	81.5	1300	31.20	60000	1	62.0	156.7