




120X120X32mm




General Specifications

Airflow	23.0~47.5 CFM
Static Pressure	8.0~41.7 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #22 AWG

Dimensions:mm

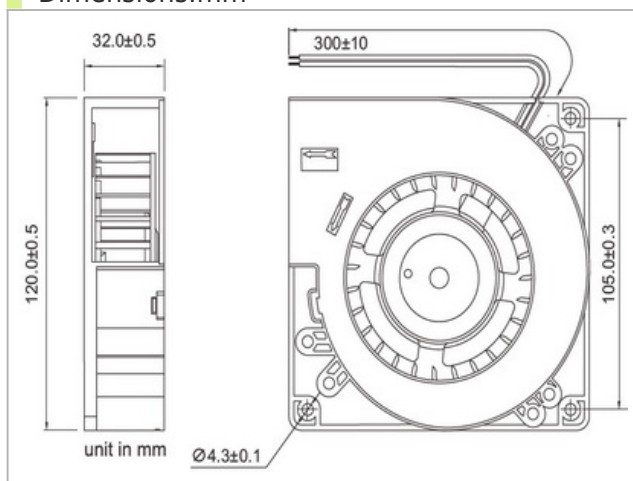

Performance

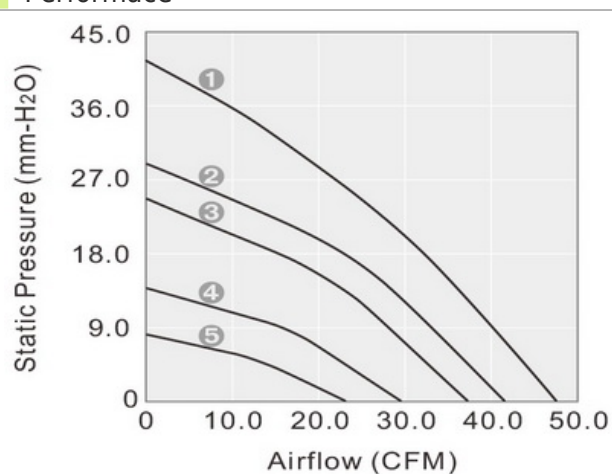

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GB121232LB	2BALL	12	7~13.2	1700	23.0	8.0	150	1.80	80000	5	42.5	258.5
GB121232MB	2BALL	12	7~13.2	2100	29.5	13.8	250	3.00	80000	4	49.5	258.5
GB121232HB	2BALL	12	7~13.2	2600	37.2	24.7	700	8.40	75000	3	57.0	258.5
GB121232EB	2BALL	12	7~13.2	2900	41.4	29.0	900	10.80	65000	2	59.0	258.5
GB121232UB	2BALL	12	7~13.2	3500	47.5	41.7	1500	18.00	65000	1	62.0	258.5
GB241232LB	2BALL	24	12~26.4	1700	23.0	8.0	120	2.88	80000	5	42.5	258.5
GB241232MB	2BALL	24	12~26.4	2100	29.5	13.8	180	4.32	80000	4	49.5	258.5
GB241232HB	2BALL	24	12~26.4	2600	37.2	24.7	260	6.24	75000	3	57.0	258.5
GB241232EB	2BALL	24	12~26.4	2900	41.4	29.0	450	10.80	65000	2	59.0	258.5
GB241232UB	2BALL	24	12~26.4	3500	47.5	41.7	830	19.92	65000	1	62.0	258.5