


JE-043A




General Specifications

Airflow	25~117 CFM
Static Pressure	0.9~1.6 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads


Performance

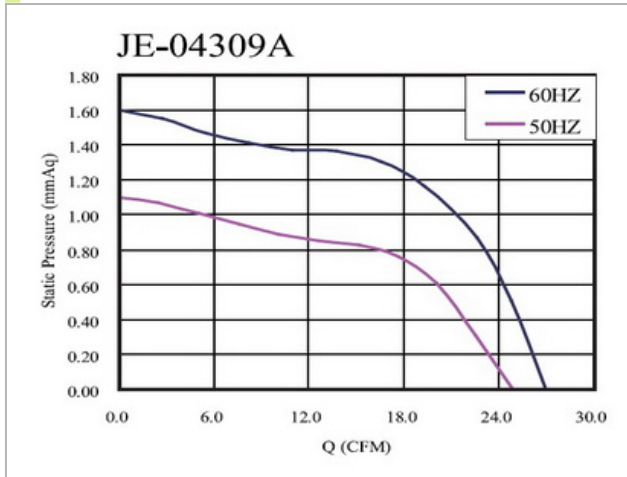

Performance

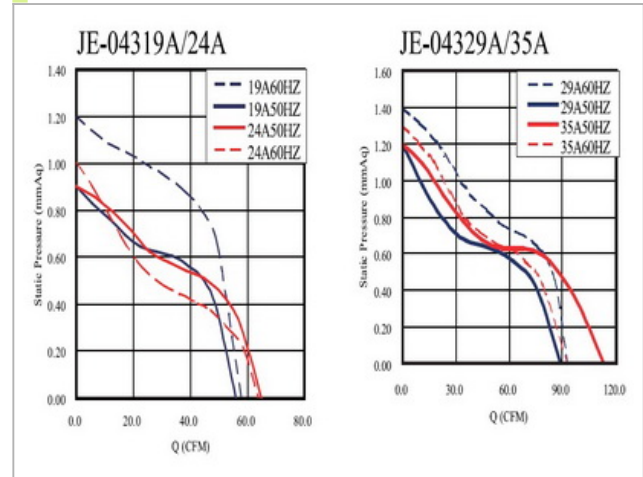

Dimensions:mm

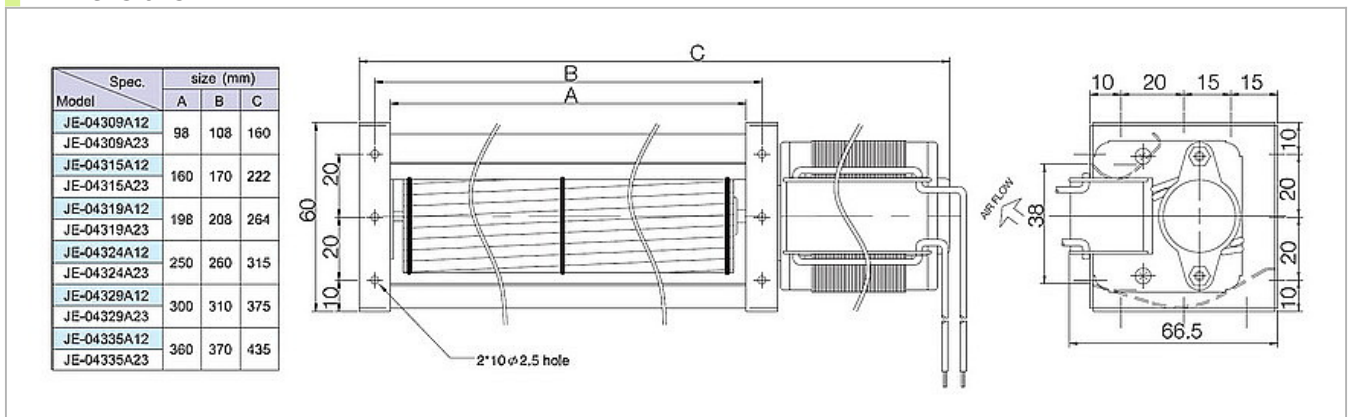

Specifications

Model NO.	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure mmAq	Current A	Power W	Noise dBA	Weight g
JE-04309A12	110/120	50/60	2600/3000	25/28	1.1/1.6	0.14/0.12	10/9	33/35	520
JE-04309A23	220/240	50/60	2600/3000	25/28	1.1/1.6	0.08/0.07	10/9	33/35	520
JE-04315A12	110/120	50/60	2500/2500	42/42	0.9/1.2	0.15/0.13	11/10	35/35	550
JE-04315A23	220/240	50/60	2500/2500	42/42	0.9/1.2	0.08/0.07	11/10	35/35	550
JE-03019A12	110/120	50/60	2400/2500	53/56	0.9/1.2	0.22/0.19	15/14	32/35	650
JE-04319A23	220/240	50/60	2400/2500	53/56	0.9/1.2	0.09/0.08	13/12	32/35	650
JE-04324A12	110/120	50/60	2400/2300	67/70	0.9/1.0	0.22/0.20	16/15	34/33	680
JE-04324A23	220/240	50/60	2300/2000	63/56	0.9/1.0	0.09/0.08	13/12	33/30	680
JE-04329A12	110/120	50/60	2600/2900	88/95	1.2/1.4	0.32/0.29	22/21	38/40	890
JE-04329A23	220/240	50/60	2500/2500	88/88	1.2/1.4	0.14/0.13	19/18	37/37	890
JE-04335A12	110/120	50/60	2500/2500	117/117	1.2/1.3	0.34/0.32	23/23	38/38	920
JE-04335A23	220/240	50/60	2400/2100	113/88	1.2/1.3	0.15/0.14	20/19	36/33	920

