





General Specifications

Airflow	24~116 CFM
Static Pressure	2.7~4.3 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performace


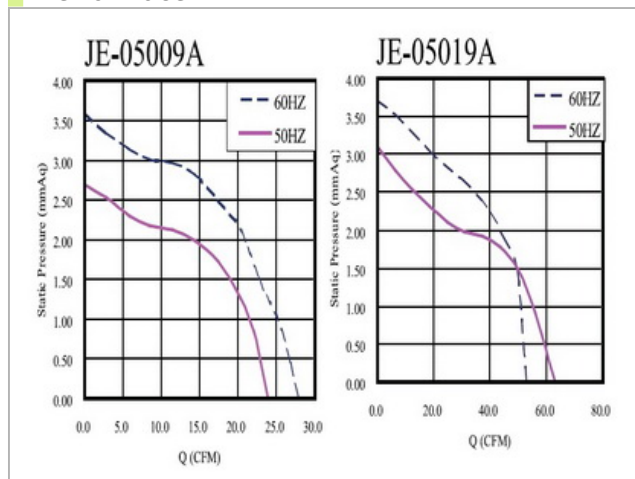


Performace

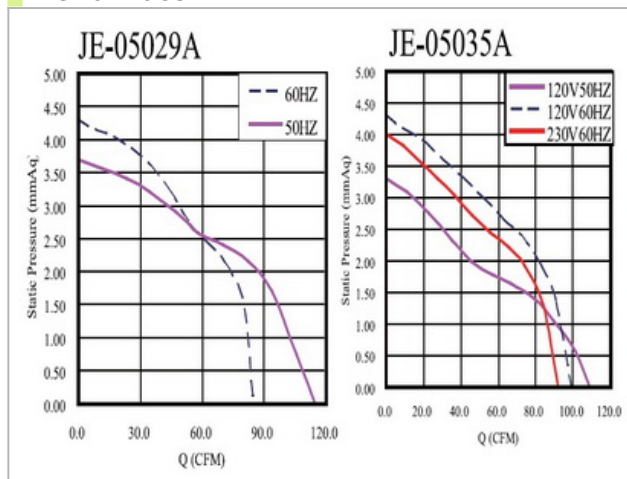

Dimensions:mm

Model \ Spec.	Size (mm)		
	A	B	C
JE-05009A12	98	108	162
JE-05009A23			
JE-05019A12	198	208	267
JE-05019A23			
JE-05029A12	298	308	377
JE-05029A23			
JE-05035A12	358	368	437
JE-05035A23			

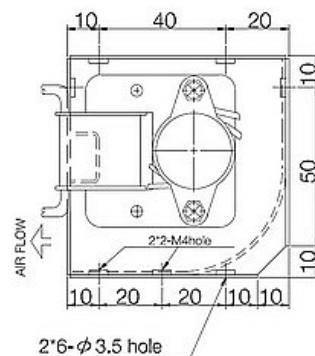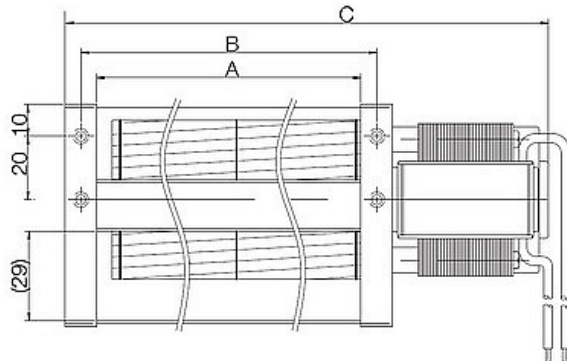

Specifications

Model NO.	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise	Weight
	VAC	HZ	RPM	CFM	mmAq	A	W	dBA	g
JE-05009A12	110/120	50/60	2500/2600	24/28	2.7/3.6	0.15/0.13	11/10	36/37	610
JE-05009A23	220/240	50/60	2500/2600	24/28	2.7/3.6	0.09/0.07	11/10	36/37	610
JE-05019A12	110/120	50/60	2200/1800	67/60	3.1/3.7	0.23/0.21	18/16	36/33	770
JE-05019A23	220/240	50/60	2100/1700	63/56	3.1/3.6	0.10/0.09	14/13	35/32	770
JE-05029A12	110/120	50/60	2300/2000	116/88	3.7/4.3	0.35/0.33	24/24	41/37	1100
JE-05029A23	220/240	50/60	2300/1800	116/81	3.7/4.1	0.15/0.14	21/20	41/35	1100
JE-05035A12	110/120	50/60	2300/2000	110/103	3.7/4.3	0.35/0.33	23/23	41/36	1200
JE-05035A23	220/240	50/60	2200/1600	110/92	3.5/4.0	0.15/0.14	20/19	40/34	1200