





General Specifications

Airflow	63~180 CFM
Static Pressure	2.2~7.3 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performace

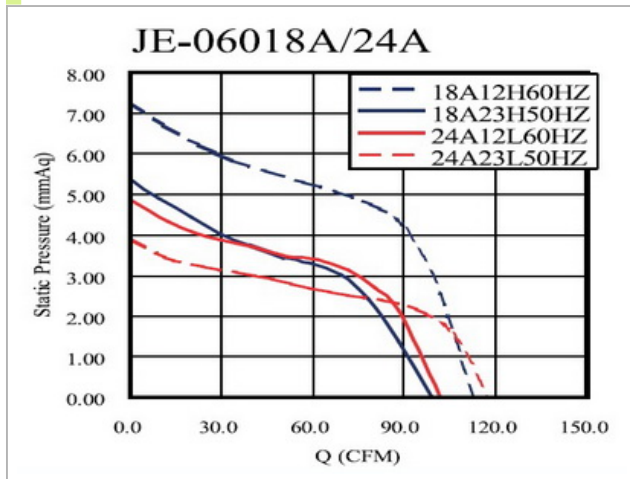


Performace

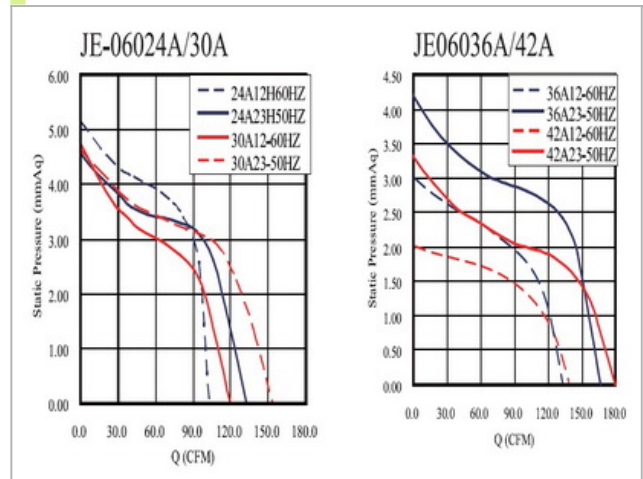

Dimensions:mm

Model	Spec.	Size (mm)			
		A	B	C	D
JE-00018A12L		184	199	257	
JE-00018A23L					
JE-00018A12H		184	199	262	280
JE-00024A23H					
JE-00024A12L		245	260	323	
JE-00024A23L					
JE-00024A12H		245	260	323	341
JE-00024A23H					
JE-00030A12		306	321	384	402
JE-00030A23					
JE-00036A12		368	383	446	464
JE-00036A23					
JE-00042A12		429	444	507	525
JE-00042A23					

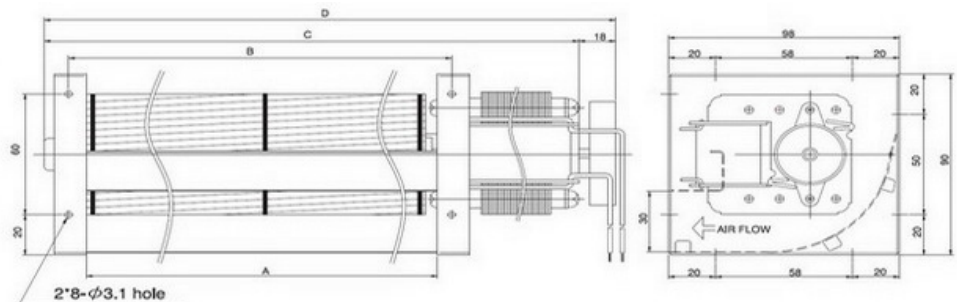

Specifications

Model NO.	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise	Weight
	VAC	HZ	RPM	CFM	mmAq	A	W	dBA	g
JE-06018A12L	110/120	50/60	1700	63	3.8	0.33	23	35	1200
JE-06018A23L	220/240	50/60	2000	88	3.7	0.17	23	39	1200
JE-06018A12H	110/120	50/60	2500	106	7.3	0.55	37	47	1350
JE-06018A23H	220/240	50/60	2500	106	5.4	0.27	34	47	1350
JE-06024A12L	110/120	50/60	1900	102	4.9	0.42	31	41	1400
JE-06042A23L	220/240	50/60	2000	118	3.9	0.23	31	42	1400
JE-06024A12H	110/120	50/60	2000	106	5.1	0.60	42	42	1500
JE-06024A23H	220/240	50/60	2200	133	4.6	0.27	35	44	1500
JE-06030A12	110/120	50/60	1900	114	4.7	0.63	42	42	1500
JE-06030A23	220/240	50/60	2200	154	4.6	0.28	36	44	1500
JE-06036A12	110/120	50/60	1700	133	3.0	0.64	43	41	1600
JE-06036A23	220/240	50/60	2000	167	4.2	0.30	38	43	1600
JE-06042A12	110/120	50/60	1600	139	2.2	0.64	44	41	1650
JE-06042A23	220/240	50/60	1800	180	3.3	0.31	40	43	1650

