


JED/JF3-030A




General Specifications

Airflow	22~53 CFM
Static Pressure	1.5~1.9 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performance

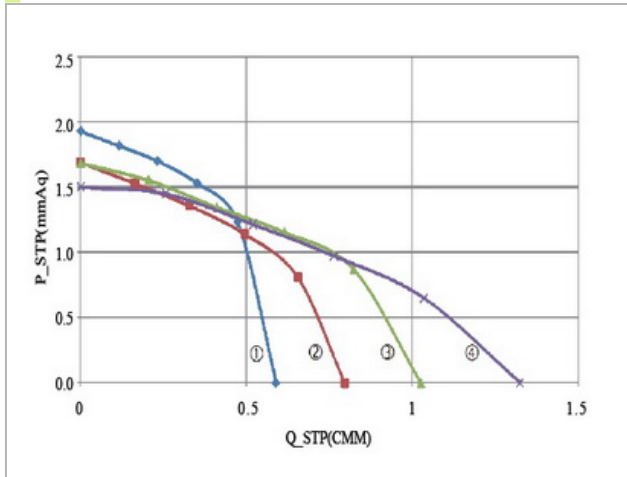


Performance

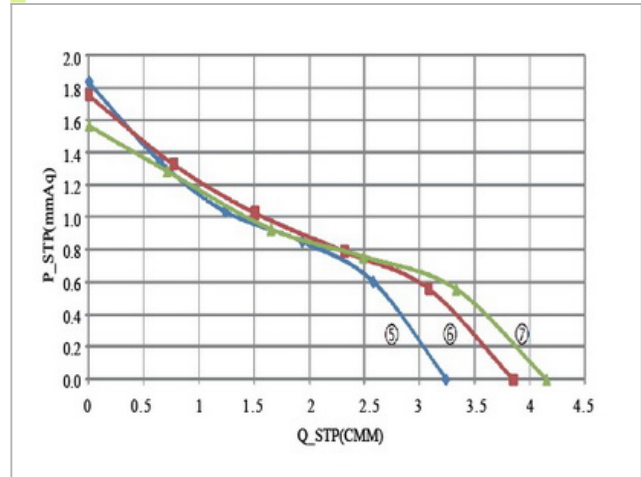

Dimensions:mm

Model	Spec.	Size(mm)			
		A	B	C	D
JED-03009A12-3B	①	98	108	134	31
JED-03009A24-3B	①	98	108	134	31
JED-03015A12-3B	②	160	170	196	31
JED-03015A24-3B	②	160	170	196	31
JED-03019A12-3B	③	198	208	234	31
JED-03019A24-3B	③	198	208	234	31
JED-03029A12-3B	④	300	310	336	31
JED-03029A24-3B	④	300	310	336	31
JF3-3030X2A24Q-4B	⑤	630	640	680	38
JF3-3035X2A24Q-4B	⑥	730	740	780	38
JF3-3040X2A24Q-4B	⑦	830	840	880	38

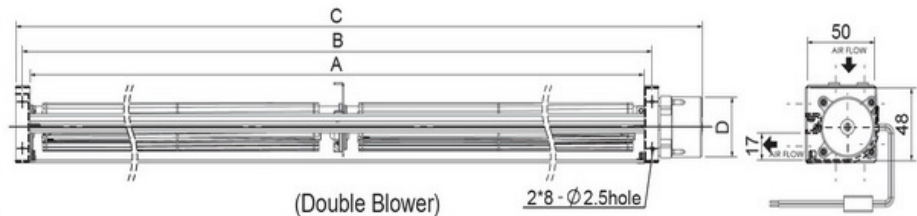

Specifications

Model NO.	Rated Voltage	Speed Airflow		Static Pressure	CurrentNoiseWeight		
	VDC	RPM	CFM		A	dBA	g
JED-03009A12	12	3200	22	1.9	0.15	29	180
JED-03009A24	24	3200	22	1.9	0.18	29	180
JED-03015A12	12	3100	28	1.7	0.16	30	210
JED-03015A24	24	3100	28	1.7	0.15	30	210
JED-03019A12	12	2900	35	1.7	0.20	31	230
JED-03019A24	24	2900	35	1.7	0.16	31	230
JED-03029A12	12	2600	46	1.5	0.22	33	290
JED-03029A24	24	2600	46	1.5	0.20	33	290
JF3-3030X2A24Q-4B	24	2850	112.32	1.8	0.22	36	580
JF3-3035X2A24Q-4B	24	2750	136.90	1.7	0.25	35	630
JF3-3040X2A24Q-3B	24	2650	147.42	1.6	0.28	34	690