


JED/JE3/JF3-040A




General Specifications

Airflow	0.7~4.6 m ³ /min
Static Pressure	2.0~2.9 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performance

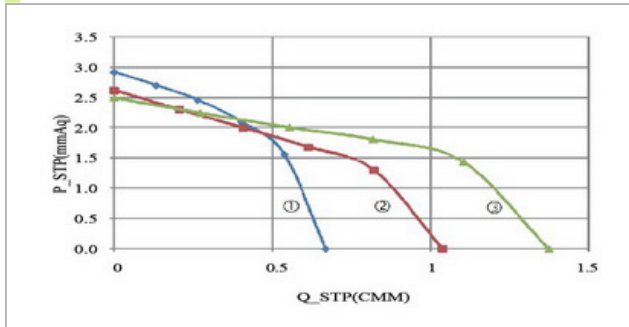


Performance

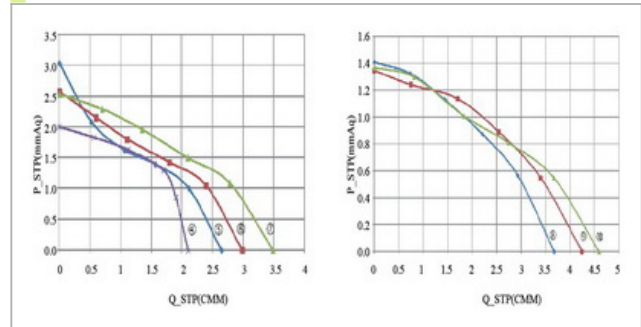

Dimensions:mm

Model	Spec	Size(mm)			
		A	B	C	D
JED-04009A12-3B	①	98	108	144	31
JED-04009A24-3B	①	98	108	144	31
JED-04015A12-3B	②	160	170	206	31
JED-04015A24-3B	②	160	170	206	31
JED-04019A12Q-3B	③	198	208	246	38
JED-04019A24Q-3B	③	198	208	246	38
JED-04029A12Q-3B	④	300	310	348	38
JED-04029A24Q-3B	④	300	310	348	38
JE3-04030A24-3B	⑤	310	320	350	38
JE3-04035A24-3B	⑥	360	370	400	38
JE3-04040A24-3B	⑦	410	420	450	38
JF3-4030X2A24-3B	⑧	630	640	660	38
JF3-4035X2A24-3B	⑨	730	740	760	38
JF3-4040X2A24-3B	⑩	830	840	860	38

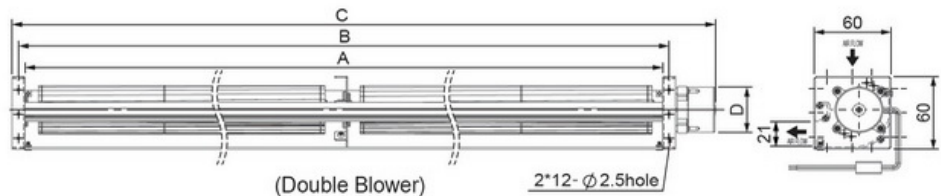

Specifications

Model NO.	Rated Voltage		Speed		Airflow	Static Pressure		Current		Noise	Weight
	VDC		RPM	M3/MIN		mmAq		A	dBA		
JED-04009A12Q	12		3000	0.7		2.9		0.20	33		220
JED-04009A24Q	24		3000	0.7		2.9		0.15	33		220
JED-04015A12Q	12		2600	1.0		2.6		0.25	31		260
JED-04015A24Q	24		2600	1.0		2.6		0.25	31		260
JED-04019A12Q	12		2500	1.4		2.5		0.30	33		310
JED-04019A24Q	24		2500	1.4		2.5		0.20	33		310
JED-04029A12Q	12		2300	2.1		2.0		0.40	33		410
JED-04029A24Q	24		2300	2.1		2.0		0.20	33		410
JE3-04030A24-3B	24		2600	2.6		3.0		0.30	39		440
JE3-04035A23-3B	24		2450	3.0		2.6		0.32	38		470
JF3-04040A24-3B	24		2300	3.5		2.5		0.34	37		510
JF3-4030X2A24-3B	24		1800	3.7		1.4		0.26	39		690
JF3-4035X2A24-3B	24		1750	4.2		1.4		0.27	38		770
JF3-4040X2A24-3B	24		1600	4.6		1.3		0.28	37		830