





General Specifications

Airflow	1.2~3.4 m3/min
Static Pressure	1.1/1.7 mmAq
Housing	Aluminum
Blade	ALUMINUM ALLOY
Connecting	Wire Leads


Performance

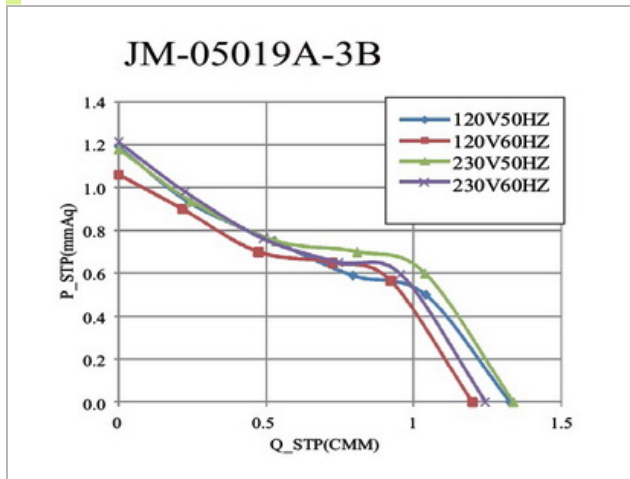

Performance

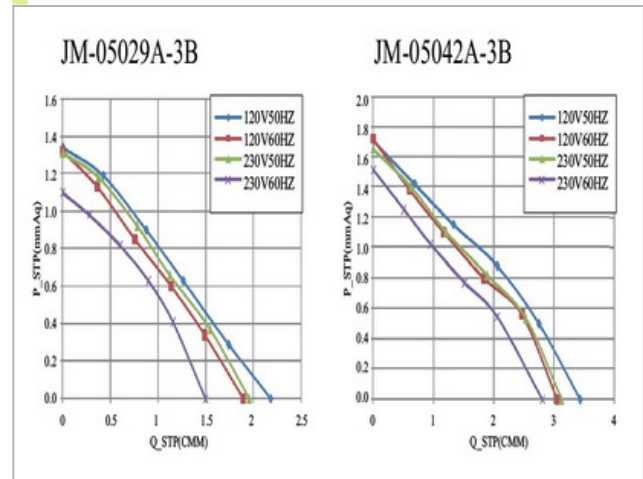

Dimensions:mm

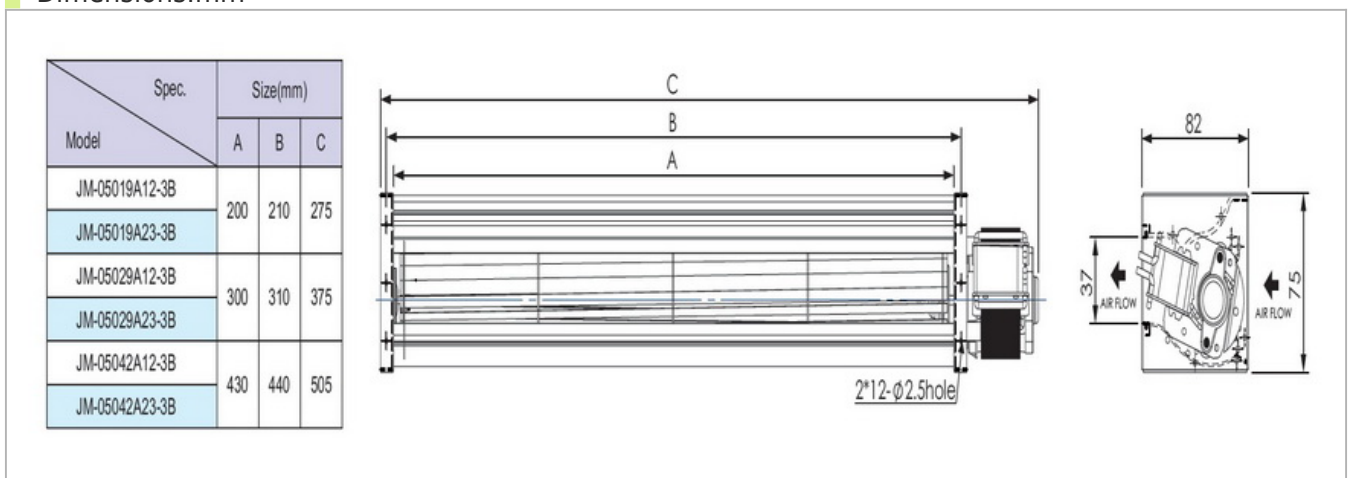

Specifications

Model NO.	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise	Weight
	VAC	HZ	RPM	M3/MIN	mmAq	A	W	dBA	g
JM-05019A12-3B	110/120	50/60	2200/2050	1.3/1.2	1.2/1.1	0.15/0.13	12/11	31/28	715
JM-05019A23-3B	220/240	50/60	2150/2050	1.3/1.2	1.2/1.2	0.08/0.07	13/12	30/28	715
JM-05029A12-3B	110/120	50/60	2250/2050	2.2/1.9	1.3/1.3	0.22/0.20	16/15	32/28	885
JM-05029A23-3B	220/240	50/60	2150/1850	2.0/1.5	1.3/1.1	0.09/0.09	16/15	30/25	885
JM-05042A12-3B	110/120	50/60	2400/2300	3.4/3.1	1.7/1.7	0.32/0.30	23/22	37/34	1195
JM-05042A23-3B	220/240	50/60	2300/2000	3.1/2.8	1.7/1.5	0.15/0.13	21/20	34/29	1195