





General Specifications

Airflow	3.0~6.2 m ³ /min
Static Pressure	1.8~2.6 mmAq
Housing	Aluminum
Blade	ALUMINUM ALLOY
Connecting	Wire Leads


Performance

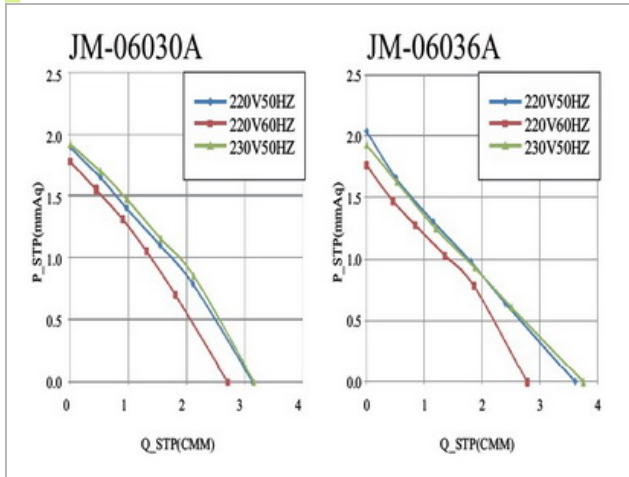

Performance

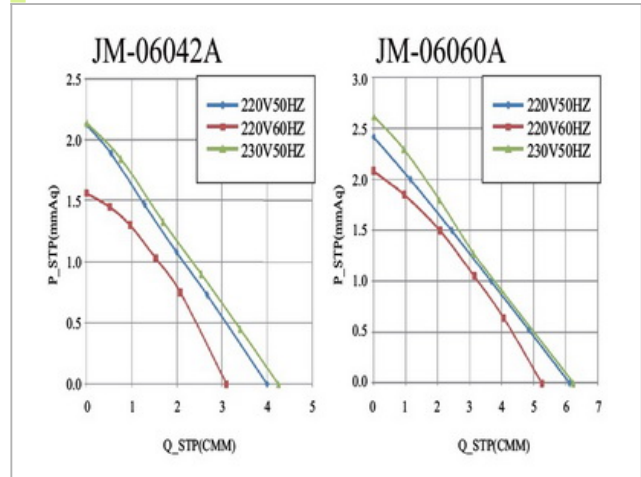

Dimensions:mm

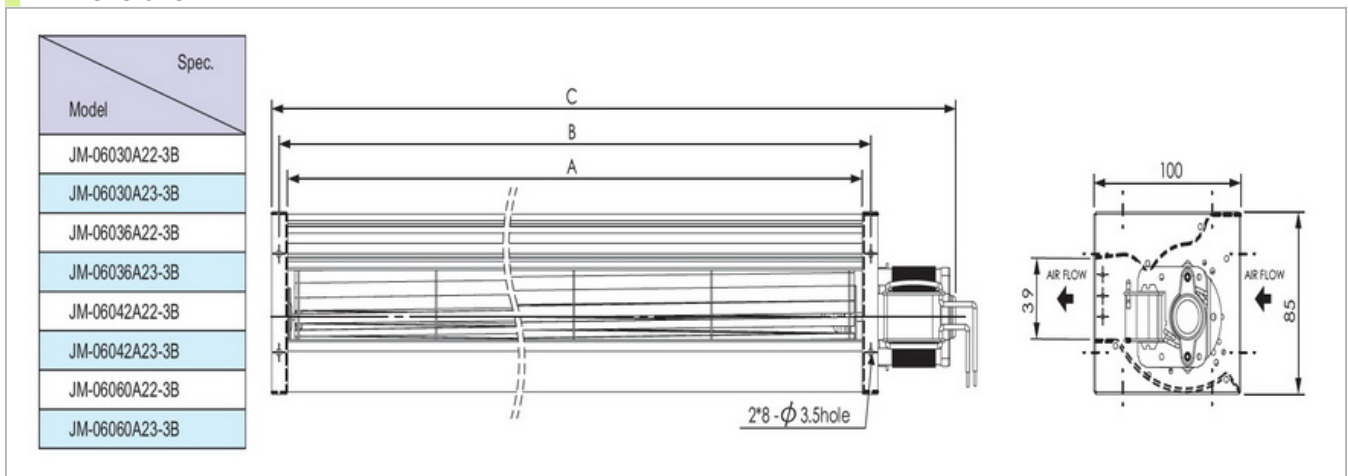

Specifications

Model NO.	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow M ³ /MIN	Static Pressure mmAq	Current A	Power W	Noise dBA	Weight KG
JM-06030A22-3B	220	50/60	2450/2400	3.1/3.0	1.8/1.8	0.19/0.18	24/24	40/38	1.5
JM-06030A23-2B	230	50	2550	3.3	1.8	0.20	26	41	1.5
JM-06036A22-3B	220	50/60	2350/2100	3.6/2.8	2.0/1.8	0.19/0.18	25/25	37/33	1.6
JM-06036A23-3B	230	50	2400	3.8	1.9	0.20	27	38	1.6
JM-06042A22-3B	220	50/60	2250/1800	4.0/3.1	2.1/1.6	0.20/0.19	26/25	39/30	1.7
JM-06042A23-3B	230	50	2300	4.2	2.1	0.21	28	37	1.7
JM-06060A22-3B	220	50/60	2450/2250	6.1/5.3	2.4/2.1	0.39/0.36	46/45	44/36	2.0
JM-06060A23-3B	230	50	2500	6.2	2.6	0.43	51	44	2.0