


# JM3-050A




## General Specifications

|                 |                |
|-----------------|----------------|
| Airflow         | 2.5~3.1 m3/min |
| Static Pressure | 1.7~1.8 mmAq   |
| Housing         | ALUMINUM ALLOY |
| Blade           | ALUMINUM ALLOY |
| Connecting      | Wire Leads     |

## Performance

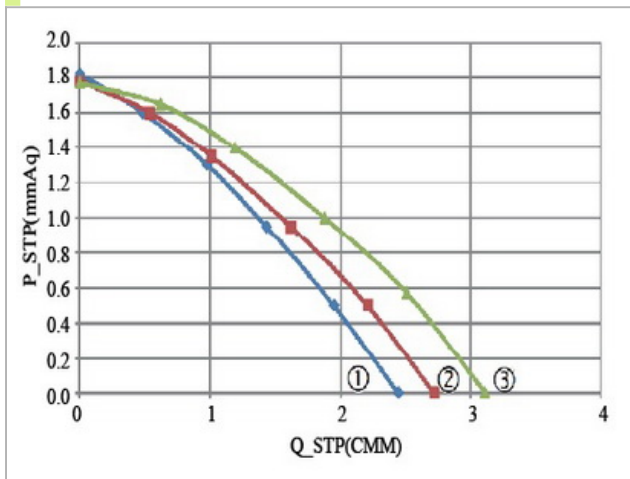

## Dimensions:mm

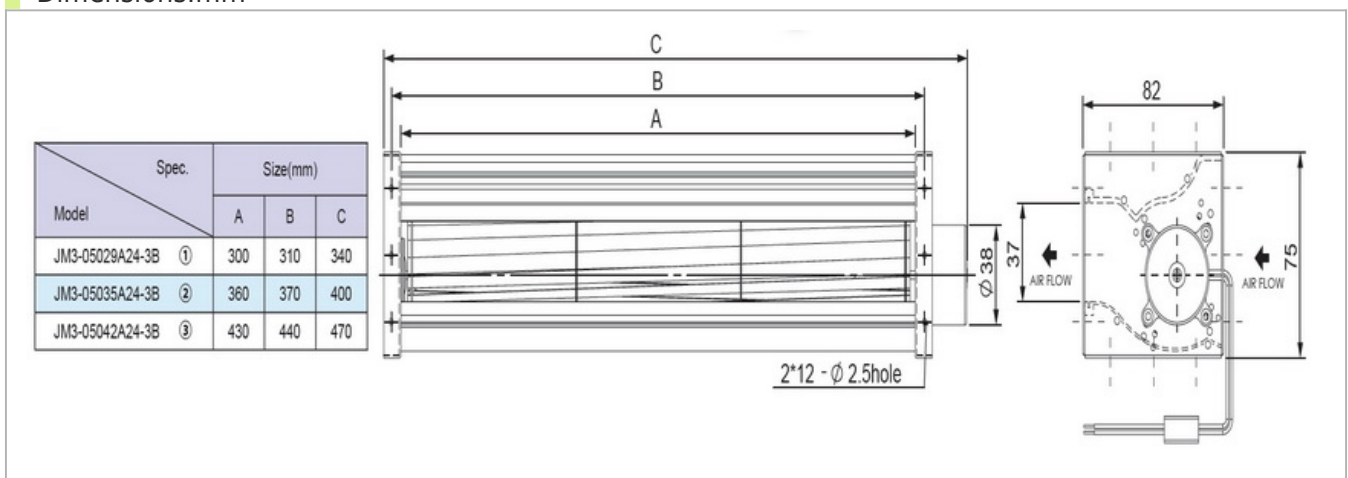

## Specifications

| Model NO.       | Rated Voltage | Speed Airflow |        | Static Pressure | Current Noise Weight |     |     |
|-----------------|---------------|---------------|--------|-----------------|----------------------|-----|-----|
|                 | VDC           | RPM           | M3/MIN |                 | A                    | dBA | g   |
| JM3-05029A24-3B | 24            | 2700          | 2.5    | 1.8             | 0.29                 | 37  | 600 |
| JM3-05035A24-3B | 24            | 2600          | 2.7    | 1.8             | 0.30                 | 38  | 660 |
| JM3-05042A24-3B | 24            | 2500          | 3.1    | 1.7             | 0.32                 | 39  | 730 |