


JE3/JF3-050A




General Specifications

Airflow	1.3~7.4 m3/min
Static Pressure	1.9~5.9 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performance

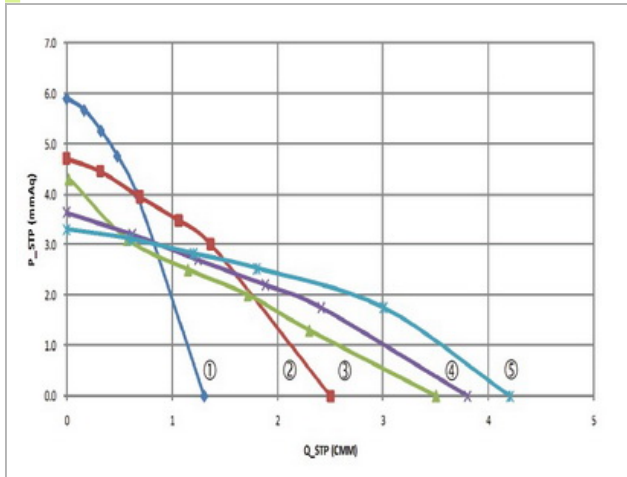


Performance

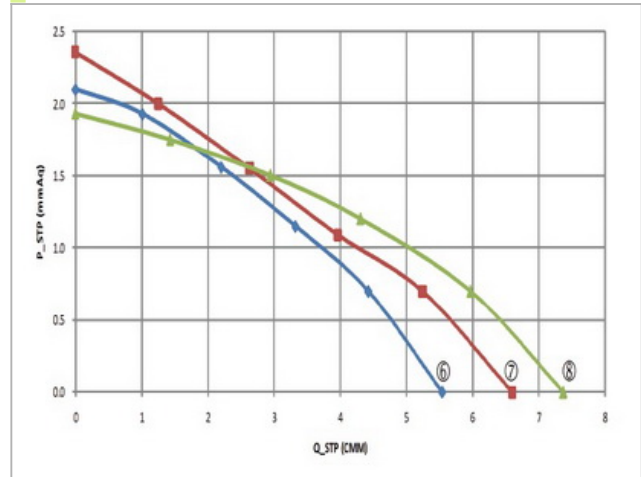

Dimensions:mm

Model	Spec.	Size(mm)			
		A	B	C	D
JE3-05009A24-3B	①	98	108	148	38
JE3-05019A24-3B	②	198	208	248	38
JE3-05029A24-3B	③	298	308	348	38
JE3-05035A24-3B	④	358	368	408	38
JE3-05042A24-3B	⑤	428	438	478	38
JF3-5029X2A24-3B	⑥	610	620	665	56
JF3-5035X2A24-3B	⑦	730	740	785	56
JF3-5042X2A24-3B	⑧	870	880	925	56

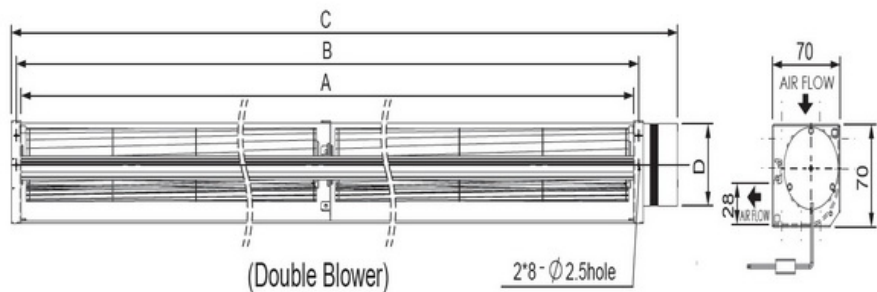

Specifications

Model NO.	Rated Voltage	Speed Airflow		Static Pressure	Current Noise Weight		
	VDC	RPM	M3/MIN		A	dBA	g
JE3-05009A24-3B	24	2600	1.3	5.9	0.13	37	370
JE3-05019A24-3B	24	2500	2.5	4.7	0.31	43	470
JE3-05029A24-3B	24	2200	3.5	4.3	0.35	44	590
JE3-05035A24-3B	24	1800	3.8	3.7	0.26	36	660
JE3-05042A24-3B	24	1700	4.2	3.3	0.27	35	730
JF3-5029X2A24-3B	24	2050	5.5	2.1	0.45	40	1030
JF3-5035X2A24-3B	24	2000	6.6	2.4	0.47	40	1140
JF3-5042X2A24-3B	24	1950	7.4	1.9	0.53	39	1250