


JE3/JG3-060A




General Specifications

Airflow	1.9~8.3 m3/min
Static Pressure	2.5~4.4 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performance

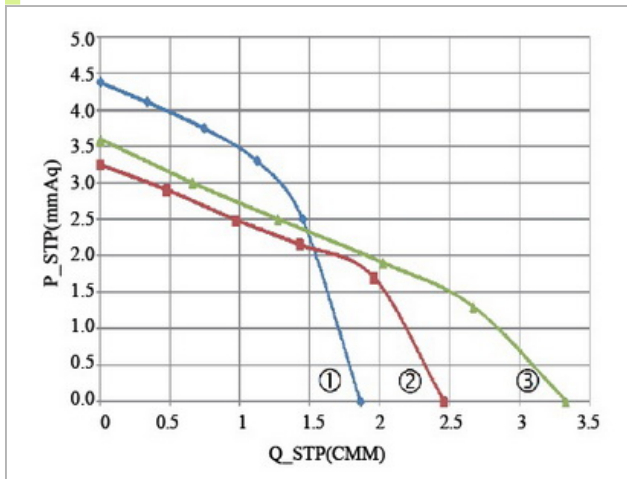


Performance

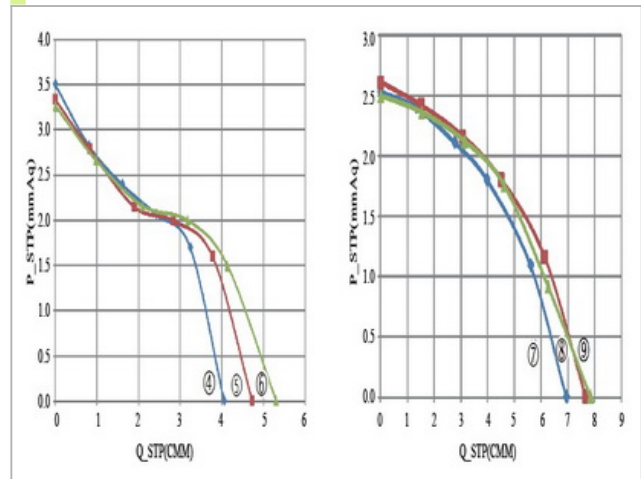

Dimensions:mm

Model	Spec.	Size(mm)			
		A	B	C	D
JE3-06012A24-3B	①	124	139	168	38
JE3-06018A24-3B	②	184	199	228	38
JE3-06024A24-3B	③	245	260	305	56
JE3-06030A24-3B	④	305	320	365	56
JE3-06036A24-3B	⑤	365	380	425	56
JE3-06042A24-3B	⑥	429	444	485	56
JG3-06060A24-3B	⑦	610	625	670	56
JG3-6036X2A24-3B	⑧	750	765	810	56
JG3-6042X2A24-3B	⑨	870	885	930	56

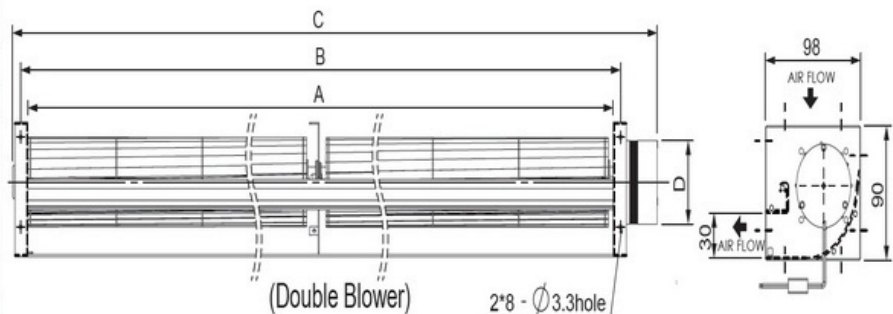

Specifications

Model NO.	Rated Voltage	Speed Airflow		Static Pressure	Current Noise Weight		
	VDC	RPM	M3/MIN		A	dBA	g
JE3-06012A24-3B	24	2500	1.9	4.4	0.35	44	500
JE3-06018A24-3B	24	2200	2.5	3.2	0.40	42	580
JE3-06024A24-3B	24	2100	3.3	3.6	0.42	41	850
JE3-06030A24-3B	24	2000	4.1	3.5	0.46	41	930
JE3-06036A24-3B	24	1950	4.7	3.4	0.51	40	1000
JE3-06042A24-3B	24	1900	5.3	3.3	0.53	40	1080
JG3-06060A24-3B	24	1650	6.9	2.5	0.63	39	1250
JG3-6036X2A24-3B	24	1700	7.7	2.6	0.69	40	1420
JG3-6042X2A24-3B	24	1600	8.3	2.5	0.78	41	1550