


80X80X25mm




General Specifications

Airflow	38.6~55.1CFM
Static Pressure	3.9~6.6mm-H2O
Blade/Housing	Plastic Material UL 94V-0 P.B.T.
Frame	Plastic Material UL 94V-0 P.P.S.
Connecting	Terminal & Wire Leads

Dimensions:mm

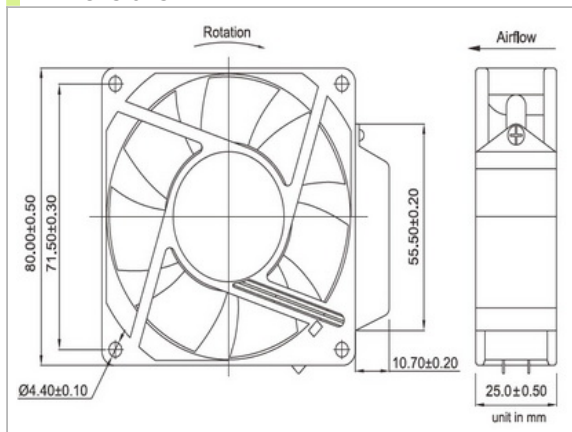

Performance

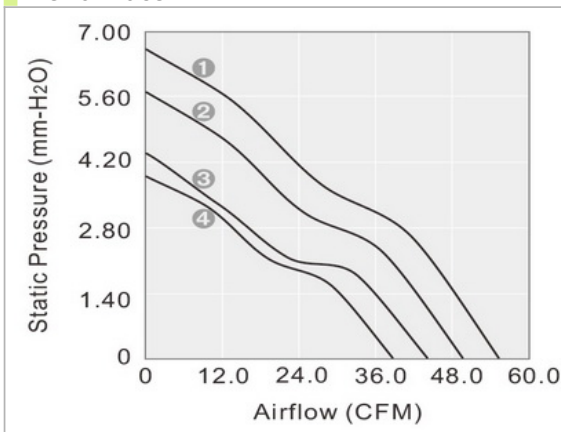

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C L10	P-Q Curve	Noise	Weight
		VAC	HZ	RPM	CFM	mm-H2O	A	W	HOURL		dBA	g
GA1082HBL(F)	2BALL	110/120	50/60	3600/4000	49.6/55.1	5.7/6.6	0.16/0.19	3.4/4.3	50000	2/1	42.0/45.5	138
GA1082HBT(F)	2BALL	110/120	50/60	3600/4000	49.6/55.1	5.7/6.6	0.16/0.19	3.4/4.3	50000	2/1	42.0/45.5	138
GA1082HSL(F)	SLEEVE	110/120	50/60	3600/4000	49.6/55.1	5.7/6.6	0.16/0.19	3.4/4.3	25000	2/1	42.0/45.5	108
GA1082HST(F)	SLEEVE	110/120	50/60	3600/4000	49.6/55.1	5.7/6.6	0.16/0.19	3.4/4.3	25000	2/1	42.0/45.5	108
GA2082HBL(F)	2BALL	220/240	50/60	3600/4000	49.6/55.1	5.7/6.6	0.15/0.18	4.3/5.3	50000	2/1	42.0/45.5	138
GA2082HBT(F)	2BALL	220/240	50/60	3600/4000	49.6/55.1	5.7/6.6	0.15/0.18	4.3/5.3	50000	2/1	42.0/45.5	138
GA2082HSL(F)	SLEEVE	220/240	50/60	3600/4000	49.6/55.1	5.7/6.6	0.15/0.18	4.3/5.3	25000	2/1	42.0/45.5	108
GA2082HST(F)	SLEEVE	220/240	50/60	3600/4000	49.6/55.1	5.7/6.6	0.15/0.18	4.3/5.3	25000	2/1	42.0/45.5	108
GA1082MBL(F)	2BALL	110/120	50/60	3200/3600	44.1/49.6	4.4/5.7	0.15/0.17	2.8/3.6	50000	3/2	38.5/42.0	138
GA2082MBL(F)	2BALL	220/240	50/60	3200/3600	44.1/49.6	4.4/5.7	0.14/0.17	3.8/4.8	50000	3/2	38.5/42.0	138
GA1082LBL(F)	2BALL	110/120	50/60	2800/3200	38.6/44.1	3.9/4.4	0.11/0.13	1.9/2.4	50000	4/3	34.0/38.5	138
GA2082LBL(F)	2BALL	220/240	50/60	2800/3200	38.6/44.1	3.9/4.4	0.11/0.13	1.9/2.4	50000	4/3	34.0/38.5	138