


280X280X89mm




General Specifications

Housing	Aluminum
Impeller	Steel
Motor Type	DC Permanent Magnet Brushless
Connecting	Wire Leads
Type of Protection	Insulation Class B, IP54

Dimensions:mm

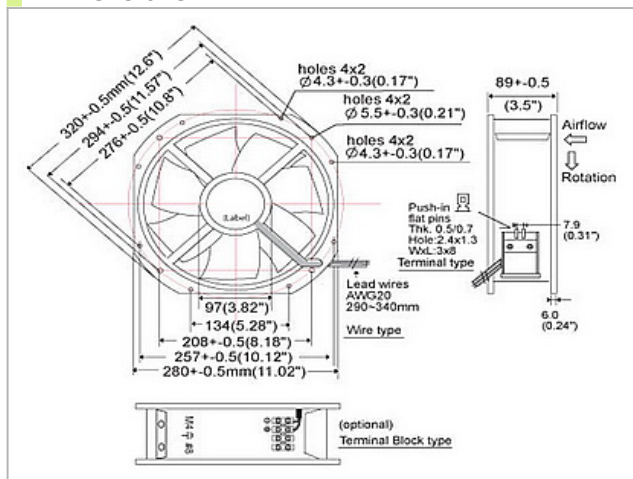

Performance

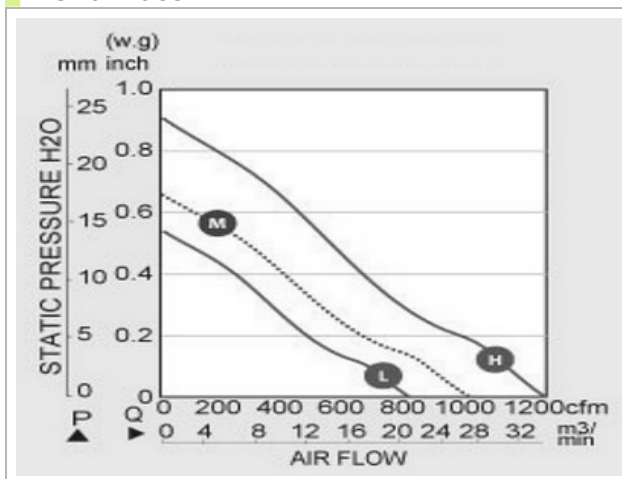

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	P-Q Curve	Noise
		VDC	VDC	RPM	CFM	mmH2O	A	W		dBA
GD1228089HB-SW	2BALL	12	9~13.5	2500	1150	22.86	10.4~11.3	125~135	H	69
GD1228089MB-SW	2BALL	12	9~13.5	2200	950	16.51	6.7~7.5	80~90	M	56
GD1228089LB-SW	2BALL	12	9~13.5	1800	780	12.95	4.3~5.2	52~62	L	48
GD2428089HB-SW	2BALL	24	18~27.6	2500	1200	22.86	5.2~5.6	125~135	H	72
GD2428089MB-SW	2BALL	24	18~27.6	2200	950	16.51	3.3~3.8	80~90	M	56
GD2428089LB-SW	2BALL	24	18~27.6	1800	780	0.55	2.2~2.6	52~62	L	48
GD4828089HB-SW	2BALL	48	24~55	2350	1200	22.86	2.6~2.8	125~135	H	71
GD4828089MB-SW	2BALL	48	24~55	2200	950	16.51	1.7~1.9	80~90	M	56
GD4828089LB-SW	2BALL	48	24~55	1800	780	13.97	1.1~1.3	52~62	L	48