




172ØX51mm




General Specifications

Housing	Aluminum
Impeller	Plastic
Motor Type	DC Permanent Magnet Brushless
Connecting	Lead wire
Type of Protection	Insulation Class B, IP54

Dimensions:mm

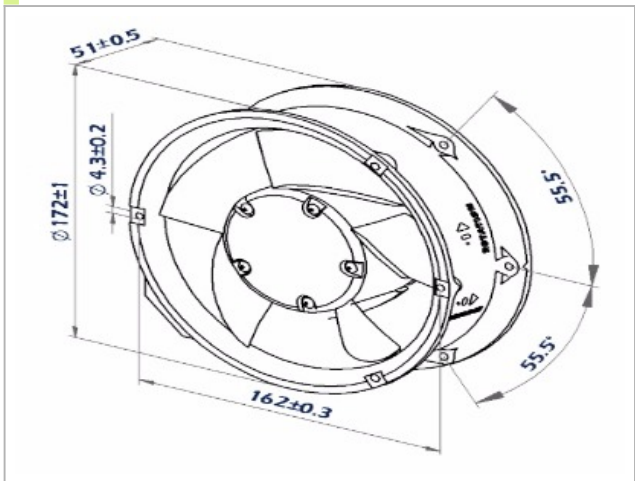

Performance

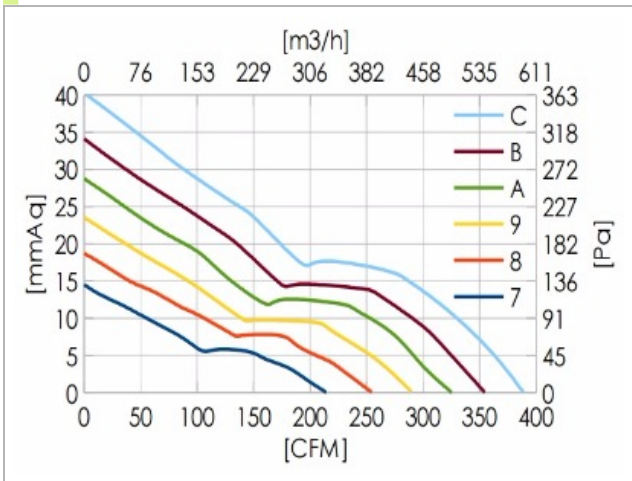

Specifications

Model NO.	Bearing	Rated Voltage	Speed	Airflow	Static Pressure	Current	P-Q Curve	Noise	Weight
		VDC	RPM	CFM	mmAq	A		dBA	g
GD121751LB-S (R)	2BALL	12	2800	220	14.5	1.31	7	52	1070
GD121751MB-S (R)	2BALL	12	3200	255	18.7	1.88	8	56	1070
GD121751HB-S (R)	2BALL	12	3600	290	23.5	2.75	9	60	1070
GD121751EB-S (R)	2BALL	12	4000	325	28.8	3.73	A	64	1070
GD241751LB-S (R)	2BALL	24	2800	220	14.5	0.65	7	52	1070
GD241751MB-S (R)	2BALL	24	3200	255	18.7	0.89	8	56	1070
GD241751HB-S (R)	2BALL	24	3600	290	23.5	1.21	9	60	1070
GD241751EB-S (R)	2BALL	24	4000	325	28.8	1.69	A	64	1070
GD241751UB-S (R)	2BALL	24	4400	355	34.1	2.41	B	68	1070
GD241751XB-S (R)	2BALL	24	4800	390	40.3	2.94	C	72	1070
GD481751LB-S (R)	2BALL	48	2800	220	14.5	0.33	7	52	1070
GD481751MB-S (R)	2BALL	48	3200	255	18.7	0.45	8	56	1070
GD481751HB-S (R)	2BALL	48	3600	290	23.5	0.60	9	60	1070
GD481751EB-S (R)	2BALL	48	4000	325	28.8	0.79	A	64	1070
GD481751UB-S (R)	2BALL	48	4400	355	34.1	1.15	B	68	1070
GD481751XB-S (R)	2BALL	48	4800	390	40.3	1.48	C	72	1070