




60X60X15mm




General Specifications

Airflow	14.1~27.0 CFM
Static Pressure	2.0~6.5 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #26 AWG

Dimensions:mm

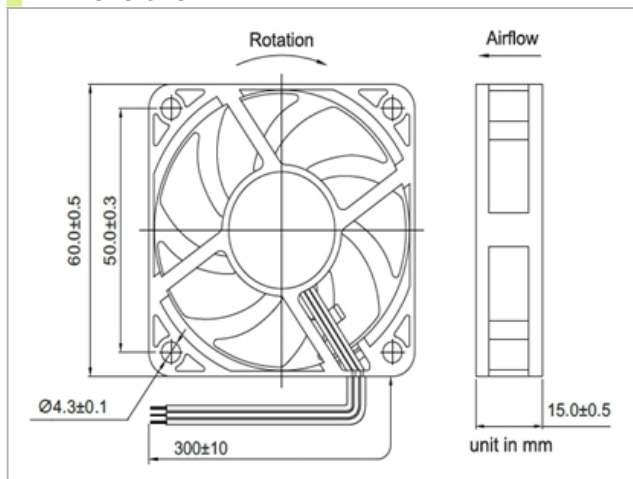

Performance

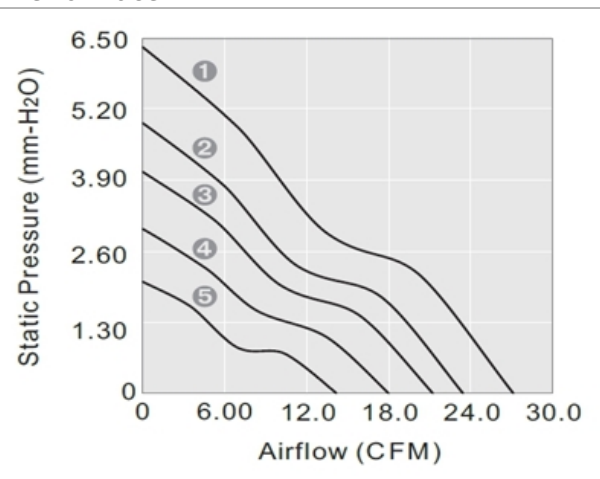

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD056015LL-N	Sintetico	5	4~5.5	3300	14.1	2.0	130	0.65	50000	5	22.0	33.5
GD056015ML-N	Sintetico	5	4~5.5	4100	18.0	3.0	200	1.00	50000	4	28.4	33.5
GD056015HL-N	Sintetico	5	4~5.5	4800	20.9	3.9	360	1.80	50000	3	33.0	33.5
GD126015LB-N	2BALL	12	7~13.2	3300	14.1	2.0	55	0.66	80000	5	22.0	33.5
GD126015MB-N	2BALL	12	7~13.2	4100	18.0	3.0	100	1.20	80000	4	28.4	33.5
GD126015HB-N	2BALL	12	7~13.2	4800	20.9	3.9	130	1.56	75000	3	33.0	33.5
GD126015EB-N	2BALL	12	7~13.2	5300	23.5	5.0	150	1.80	65000	2	35.0	33.5
GD126015EB-N	2BALL	12	7~13.2	6100	27.0	6.5	230	2.76	65000	1	38.0	33.5
GD126015LL-N	Sintetico	12	7~13.2	3300	14.1	2.0	70	0.84	50000	5	22.0	33.5
GD126015ML-N	Sintetico	12	7~13.2	4100	18.0	3.0	100	1.20	50000	4	28.4	33.5
GD126015HL-N	Sintetico	12	7~13.2	4800	20.9	3.9	130	1.56	50000	3	33.0	33.5
GD126015EL-N	Sintetico	12	7~13.2	5300	23.5	5.0	150	1.80	50000	2	35.0	33.5
GD126015EL-N	Sintetico	12	7~13.2	6100	27.0	6.5	260	3.12	50000	1	38.0	33.5
GD246015LB-N	2BALL	24	12~26.4	3300	14.1	2.0	25	0.60	80000	5	22.0	33.5
GD246015MB-N	Sintetico	24	12~26.4	4100	18.0	3.0	40	0.96	80000	4	28.4	33.5
GD246015HB-N	2BALL	24	12~26.4	4800	20.9	3.9	55	1.32	75000	3	33.0	33.5
GD246015EB-N	2BALL	24	12~26.4	5300	23.5	5.0	70	1.68	65000	2	35.0	33.5
GD246015LL-N	Sintetico	24	12~26.4	3300	14.1	2.0	25	0.60	50000	5	22.0	33.5
GD246015ML-N	Sintetico	24	12~26.4	4100	18.0	3.0	40	0.96	50000	4	28.4	33.5
GD246015HL-N	Sintetico	24	12~26.4	4800	20.9	3.9	55	1.32	50000	3	33.0	33.5
GD246015EL-N	Sintetico	24	12~26.4	5300	23.5	5.0	70	1.68	50000	2	35.0	33.5