




120X120X38mm




General Specifications

Airflow	155.8~275.9 CFM
Static Pressure	19.3~60.4 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #22 AWG

Dimensions:mm

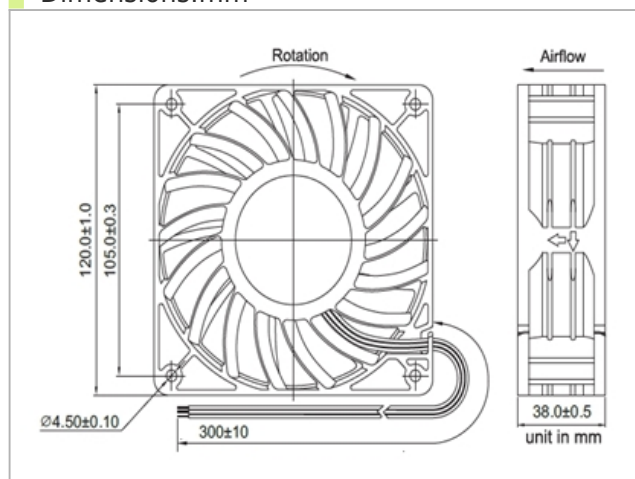

Performance

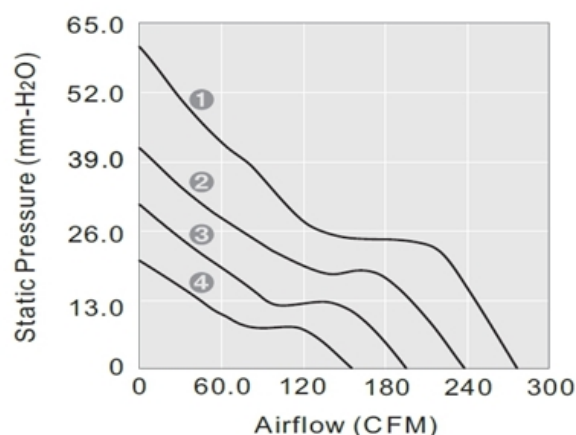

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10	P-Q Curve	Noise dBA	Weight g
GD121238LB-E	2BALL	12	7~13.2	4000	155.8	19.3	1200	14.40	80000	4	54.0	425
GD121238MB-E	2BALL	12	7~13.2	5000	194.0	30.8	2200	26.40	75000	3	60.4	425
GD121238HB-E	2BALL	12	7~13.2	6000	236.4	48.1	3500	42.00	65000	2	64.9	425
GD241238LB-E	2BALL	24	12~30	4000	155.8	19.3	680	16.32	80000	4	54.0	425
GD241238MB-E	2BALL	24	12~30	5000	194.0	30.8	950	22.80	75000	3	60.4	425
GD241238HB-E	2BALL	24	12~30	6000	235.4	41.5	1700	40.80	65000	2	64.9	425
GD241238EB-E	2BALL	24	12~30	7000	275.9	60.4	2700	64.80	65000	1	69.2	425
GD481238LB-E	2BALL	48	35~60.0	4000	155.8	19.3	370	17.76	80000	4	54.0	425
GD481238MB-E	2BALL	48	35~60.0	5000	194.0	30.8	550	26.40	75000	3	60.4	425
GD481238HB-E	2BALL	48	35~60.0	6000	235.4	41.5	800	38.40	65000	2	64.9	425
GD481238EB-E	2BALL	48	35~60.0	7000	275.9	60.4	1300	62.40	65000	1	69.2	425