




80X80X38mm




General Specifications

Airflow	55.2~135.0 CFM
Static Pressure	23.3~145.0 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1061 #22 AWG

Dimensions:mm

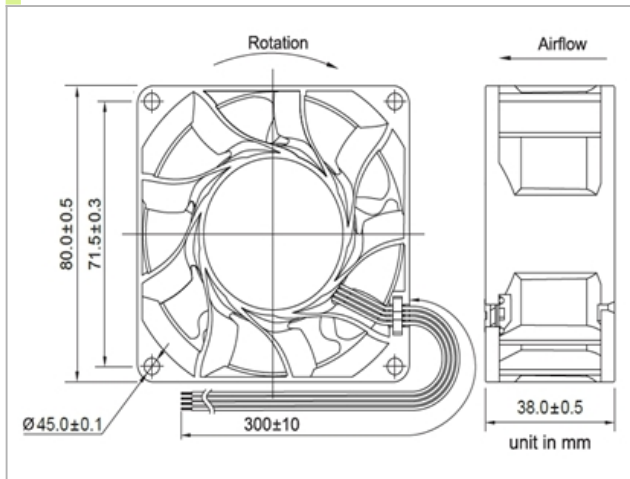

Performance

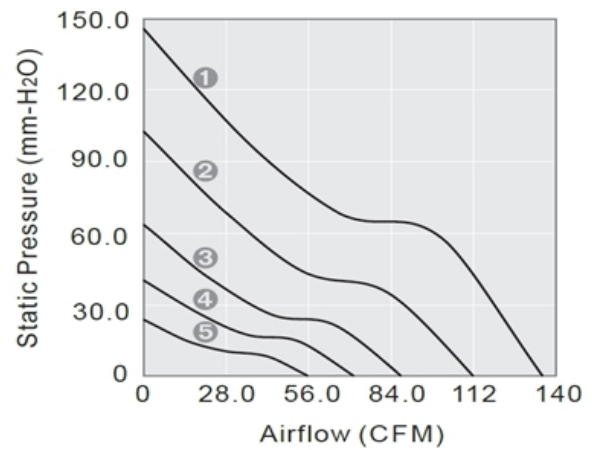

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD128038LB-E	2BALL	12	7~14.0	7000	55.2	23.3	550	6.60	80000	5	50.0	220
GD128038MB-E	2BALL	12	7~14.0	9000	70.9	39.6	950	11.40	80000	4	56.0	220
GD128038HB-E	2BALL	12	7~14.0	11000	87.1	63.0	1550	18.60	75000	3	60.8	220
GD128038EB-E	2BALL	12	7~14.0	14000	111.6	102.1	2900	34.80	65000	2	67.5	220
GD128038UB-E	2BALL	12	7~14.0	17000	135.0	145.0	4800	57.60	65000	1	69.5	220
GD248038LB-E	2BALL	24	10~30.0	7000	55.2	23.3	300	7.20	80000	5	50.0	220
GD248038MB-E	2BALL	24	10~30.0	9000	70.9	39.6	450	10.80	80000	4	56.0	220
GD248038HB-E	2BALL	24	10~30.0	11000	87.1	63.0	730	16.80	75000	3	60.8	220
GD248038EB-E	2BALL	24	10~30.0	14000	111.6	102.1	1300	31.20	65000	2	67.5	220
GD248038UB-E	2BALL	24	10~30.0	17000	135.0	145.0	2300	55.20	65000	1	69.5	220
GD488038LB-E	2BALL	48	24~75.0	7000	55.2	23.3	200	9.60	80000	5	50.0	220
GD488038MB-E	2BALL	48	24~75.0	9000	70.9	39.6	270	12.96	80000	4	56.0	220
GD488038HB-E	2BALL	48	24~75.0	11000	87.1	63.0	360	17.28	75000	3	60.8	220
GD488038EB-E	2BALL	48	24~75.0	14000	111.6	102.1	700	33.60	65000	2	67.5	220
GD488038UB-E	2BALL	48	24~75.0	17000	135.0	145.0	1200	57.60	65000	1	69.5	220