




80X80X32mm




General Specifications

Airflow	57.3~98.6 CFM
Static Pressure	20.4~47.0 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

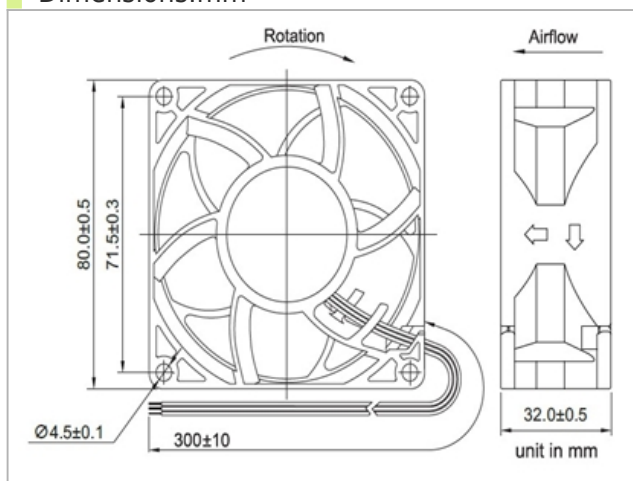

Performance

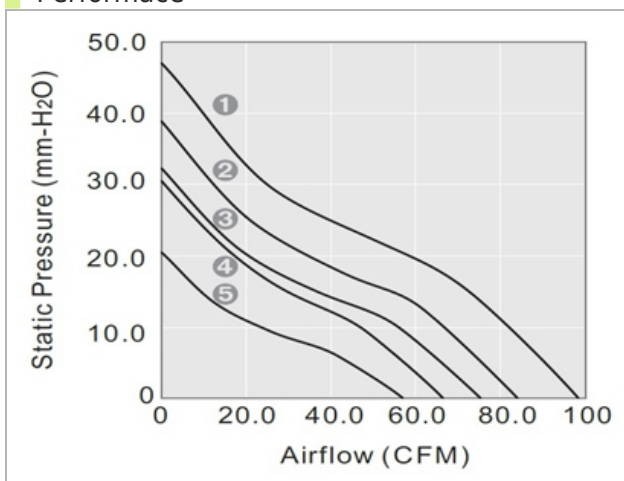

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD128032LB-E	2BALL	12	7~13.2	6600	57.3	20.4	350	4.20	80000	5	49.6	150.6
GD128032MB-E	2BALL	12	7~13.2	7600	66.8	30.6	450	5.40	80000	4	53.5	150.6
GD128032HB-E	2BALL	12	7~13.2	8600	75.4	32.0	650	7.80	75000	3	56.7	150.6
GD128032EB-E	2BALL	12	7~13.2	9600	85.0	38.7	800	9.60	65000	2	58.6	150.6
GD128032UB-E	2BALL	12	7~13.2	11000	98.6	47.0	1240	14.88	65000	1	61.9	150.6
GD248032LB-E	2BALL	24	12~26.4	6600	57.3	20.4	180	4.32	80000	5	49.6	150.6
GD248032MB-E	2BALL	24	12~26.4	7600	66.8	30.6	260	6.24	80000	4	53.5	150.6
GD248032HB-E	2BALL	24	12~26.4	8600	75.4	32.0	340	8.16	75000	3	56.7	150.6
GD248032EB-E	2BALL	24	12~26.4	9600	85.0	38.7	420	10.08	65000	2	58.6	150.6
GD248032UB-E	2BALL	24	12~26.4	11000	98.6	47.0	700	16.80	65000	1	61.9	150.6