




120X120X38mm




General Specifications

Airflow	77.9~200.7 CFM
Static Pressure	3.6~20.6 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

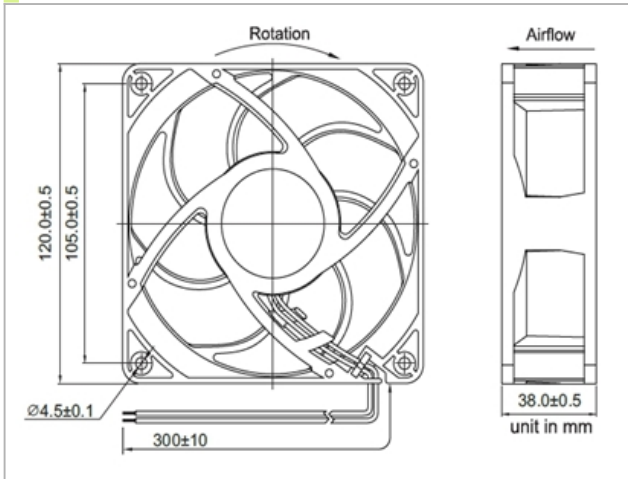

Performance

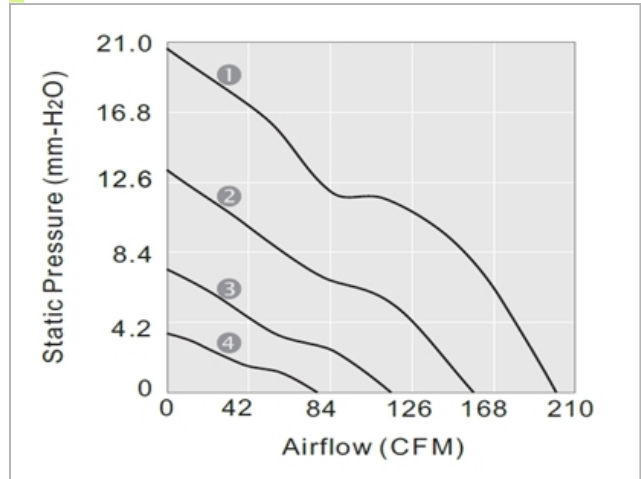

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C L10	P-Q Curve	Noise	Weight
		VDC	VDC									
GD121238LB-Q	2BALL	12	7~13.2	2000	77.9	3.6	150	1.80	80000	4	31.4	276
GD121238MB-Q	2BALL	12	7~13.2	3000	115.3	7.4	330	3.96	80000	3	43.3	276
GD121238HB-Q	2BALL	12	7~13.2	4000	158.1	13.3	750	9.00	75000	2	52.0	276
GD121238EB-Q	2BALL	12	7~13.2	5000	200.7	20.6	1600	19.20	65000	1	57.4	276
GD241238LB-Q	2BALL	24	12~26.4	2000	77.9	3.6	100	2.40	80000	4	31.4	276
GD241238MB-Q	2BALL	24	12~26.4	3000	115.3	7.4	200	4.80	80000	3	43.3	276
GD241238HB-Q	2BALL	24	12~26.4	4000	158.1	13.3	360	8.64	75000	2	52.0	276
GD241238EB-Q	2BALL	24	12~26.4	5000	200.7	20.6	750	18.00	65000	1	57.4	276
GD481238LB-Q	2BALL	48	24~56.0	2000	77.9	3.6	70	3.36	80000	4	31.4	276
GD481238MB-Q	2BALL	48	24~56.0	3000	115.3	7.4	120	5.76	80000	3	43.3	276
GD481238HB-Q	2BALL	48	24~56.0	4000	158.1	13.3	200	9.60	75000	2	52.0	276
GD481238EB-Q	2BALL	48	24~56.0	5000	200.7	20.6	380	18.24	65000	1	57.4	276